


#### SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 0.5A AC/DC
- Withstanding Voltage: 250V AC/minute
- Insulation resistance: 500MΩ Min.
- Temperature range: -45 °C – +125 °C
- Contact resistance: 50mΩ Max.

#### KY-1005HF-XX 1.00mm Pitch 180° Dual Row Wafer SMT Type

#### WAFER

- Part No.: KY-1005HF-XX
- Poles: 21, 31, 41
- Material: Base: PA46 UL94V-0
- Contact: Brass, Tin Plated
- Q'ty: 1,000 Pcs/Reel

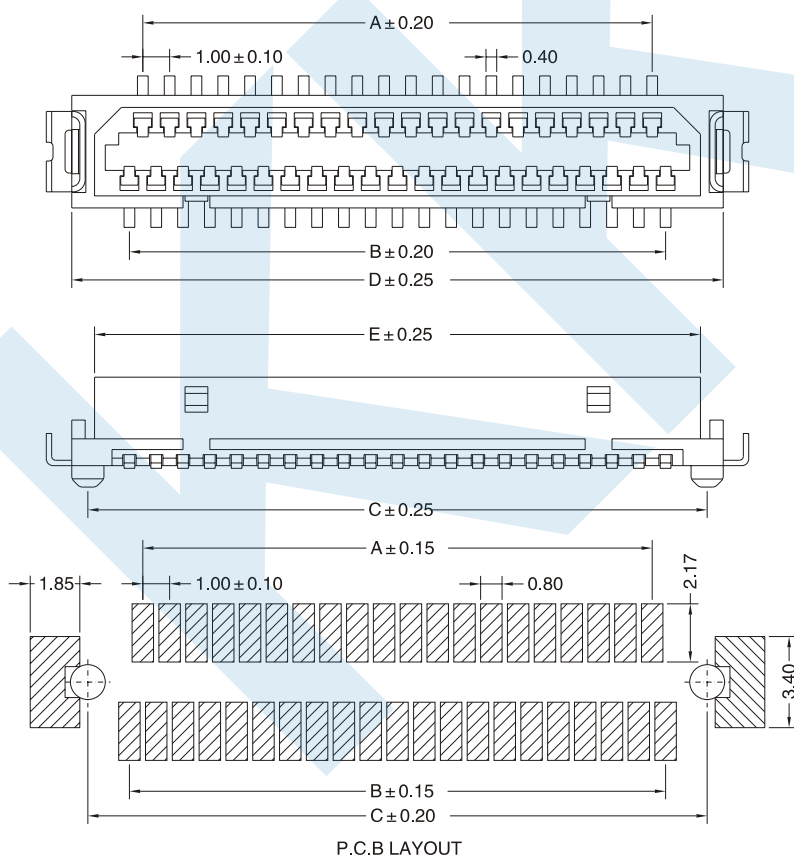


#### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)				
		A	B	C	D	E
21	KY-1005HF-21	9.00	10.00	13.10	14.30	12.50
31	KY-1005HF-31	14.00	15.00	18.10	19.30	17.50
41	KY-1005HF-41	19.00	20.00	23.10	24.30	22.50

### KY-1005HM-XX 1.00mm Pitch 180° Dual Row Wafer SMT Type

#### WAFER

- Part No.:KY-1005HM-XX
- Poles:21,31,41
- Material:Base:PA46 UL94V-0
- Contact:Brass,Tin Plated
- Q'ty:1,000 Pcs/Reel

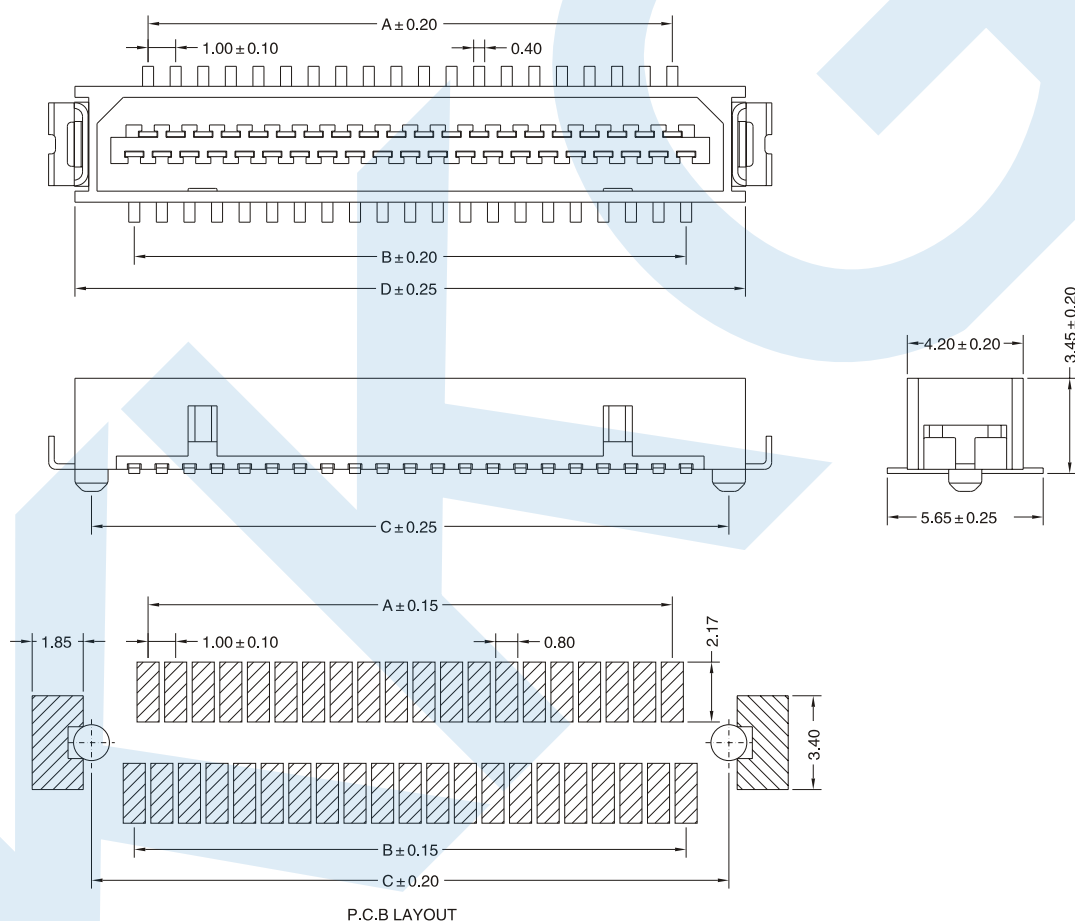

#### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)			
		A	B	C	D
21	KY-1005HM-21	9.00	10.00	13.10	14.30
31	KY-1005HM-31	14.00	15.00	18.10	19.30
41	KY-1005HM-41	19.00	20.00	23.10	24.30