

SPECIFICATIONS

Poles:4 to 33

Voltage rating (MAX):50V DC/AV(rms)

Current rating:0.5A. AC. DC

Working Temperature:-20° C to +85° C

Withstand voltage:500VAC/minute




Insulation resistance:≥800MΩ

Contact resistance:≤0.04Ω

Single Contact

HOUSING

material:LCP, UL94V-0

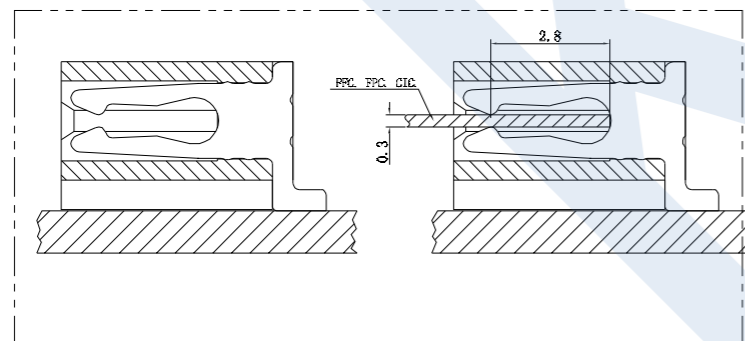

PC BOARD LAYOUT

UNITS
mm

MAT'L

FINISH

Q'TY

PCS



PART NO.(INTENDED USE)

1.25-B-nPWB

APPD:

CHKD:

DR:


HU 2016.09.28

TITLE:

1.25双面接卧贴FPC连接器

DWG NO.:

1.25-B-nPWB



SCALE
1/1

SHEET
1/1

REV.
A

X±0.3	X°±5°
.X±0.25	.X°±2°
.XX±0.20	.XX°±1°
.XXX±0.10	.XXX°±0.5°