

PITCH 1.0mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.4A

额定电压: 50V

耐电压: 200V




接触电阻: $\leq 20\text{m}\Omega$ 绝缘电阻: $500\text{M}\Omega$ 工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0



锁扣(材质): LCP, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金

焊片(材质): 磷青铜, 镀锡/镀金

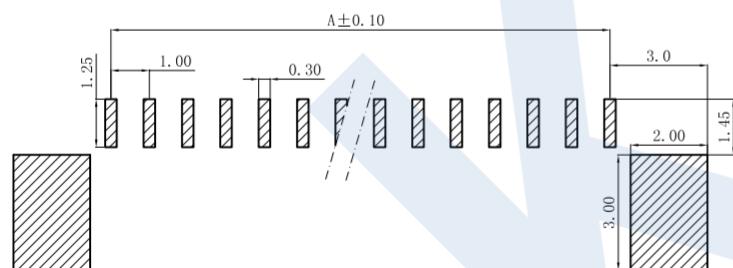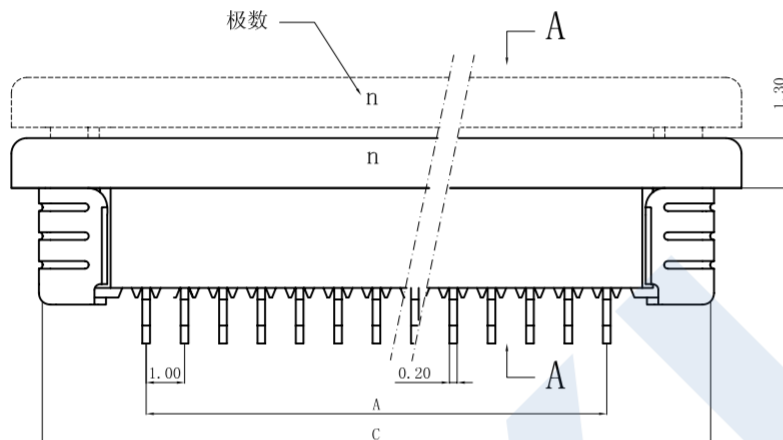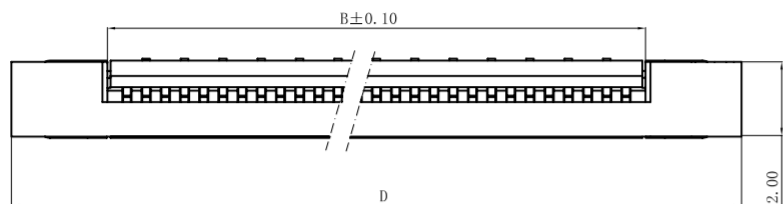

PCB Layout

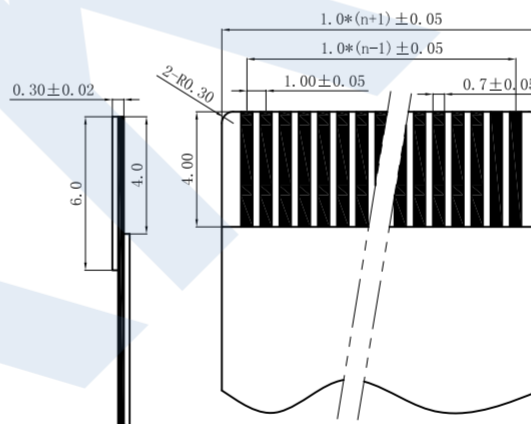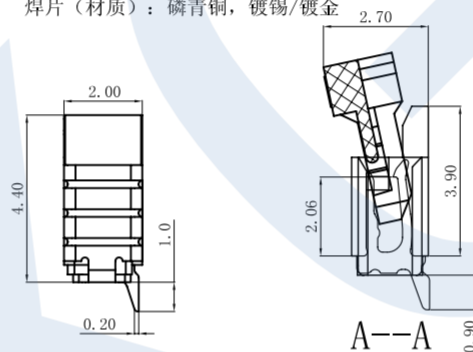

适用扁平电缆

孔位	A	B	C	D
2	1.00	3.10	6.85	8.15
3	2.00	4.10	7.85	9.15
4	3.00	5.10	8.85	10.15
5	4.00	6.10	9.85	11.15
6	5.00	7.10	10.85	12.15
7	6.00	8.10	11.85	13.15
8	7.00	9.10	12.85	14.15
9	8.00	10.10	13.85	15.15
10	9.00	11.10	14.85	16.15
11	10.00	12.10	15.85	17.15
12	11.00	13.10	16.85	18.15
13	12.00	14.10	17.85	19.15
14	13.00	15.10	18.85	20.15
15	14.00	16.10	19.85	21.15
16	15.00	17.10	20.85	22.15
17	16.00	18.10	21.85	23.15
18	17.00	19.10	22.85	24.15
19	18.00	20.10	23.85	25.15
20	19.00	21.10	24.85	26.15
21	20.00	22.10	25.85	27.15
22	21.00	23.10	26.85	28.15
23	22.00	24.10	27.85	29.15
24	23.00	25.10	28.85	30.15
25	24.00	26.10	29.85	31.15
26	25.00	27.10	30.85	32.15
27	26.00	28.10	31.85	33.15
28	27.00	29.10	32.85	34.15
29	28.00	30.10	33.85	35.15
30	29.00	31.10	34.85	36.15

X. ± 0.3	X.° $\pm 5^{\circ}$	UNITS mm
.X ± 0.25	.X° $\pm 2^{\circ}$	MAT'L
.XX ± 0.20	.XX° $\pm 1^{\circ}$	FINISH
.XXX ± 0.10	.XXX° $\pm 0.5^{\circ}$	Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		

NAME (INTENDED USE)	1.0mm FPC (A型) 下接 (H=2.0)
PART NO. (INTENDED USE)	1.0K-MX-nPWB
APPD:	
CHKD:	
DR:	YLZ 2011.09.28

TITLE: 1.0mm FPC (A型) 下接 (H=2.0)		
DWG NO.: 100K04-AXB0000000		
	SCALE 1/1	SHEET 1/1
	REV. A	