



### SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.

### KY-1007HL-XX 1.00mm Pitch Housing

### HOUSING


- Part No.: KY-1007HL-XX
- Poles: 20, 30, 40, 50
- Material: PBT+15%G.F UL 94V-0
- Q'ty: 1,000Pcs/Bag

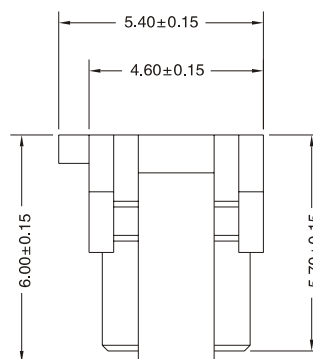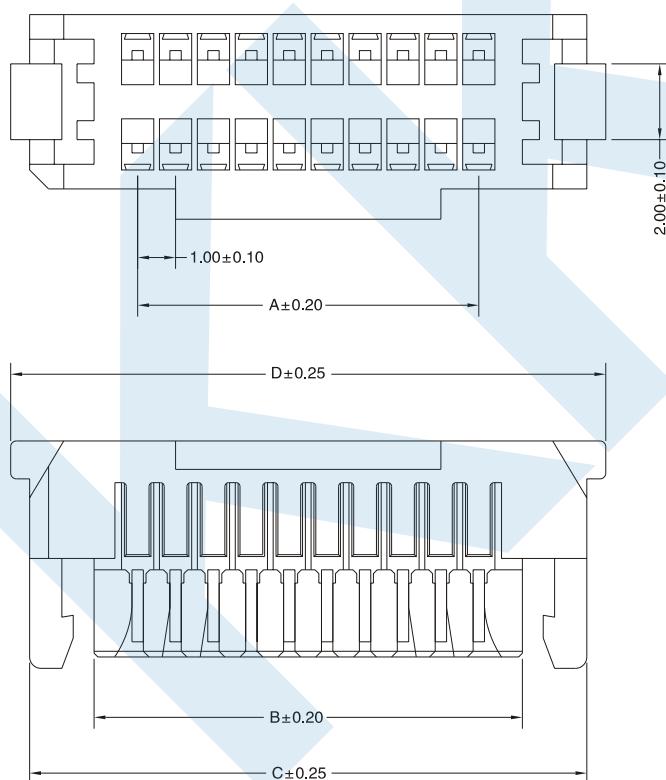

### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)			
		A	B	C	D
20	KY-1007HL-20	9.00	11.30	14.70	15.70
30	KY-1007HL-30	14.00	16.30	19.70	20.70
40	KY-1007HL-40	19.00	21.30	24.70	25.70
50	KY-1007HL-50	24.00	26.30	29.70	30.70


#### KY-1007TPS-30 1.00mm Pitch Terminal

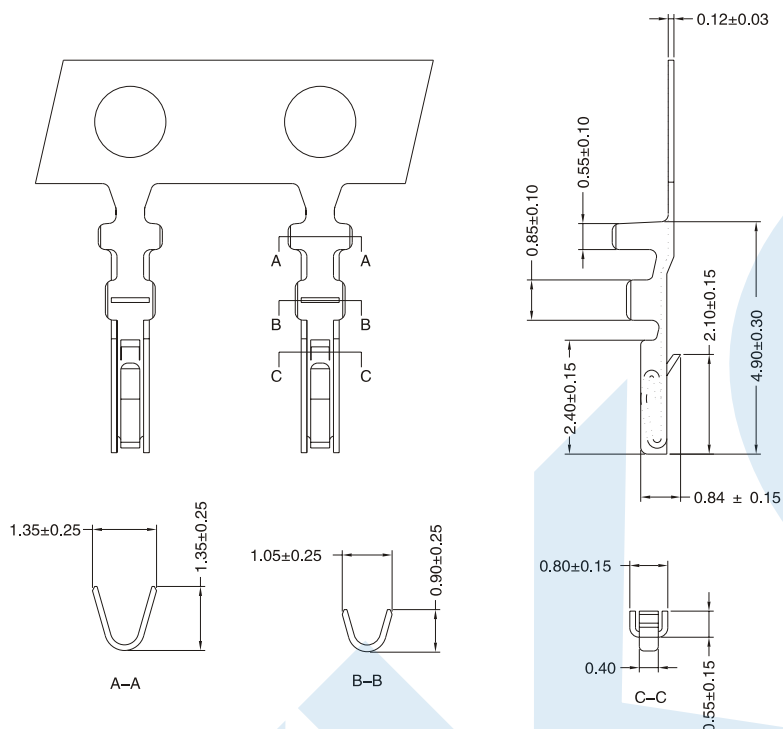

#### TERMINAL

- Part No.:KY-1007TPS-30
- Thickness:0.12mm
- Material:Phosphor Bronze
- Finish:Gold Plated
- Q'ty:15,000Pcs/Reel

#### KY-1007WS-XX 1.00mm Pitch 180° Dual Row Wafer SMT Type

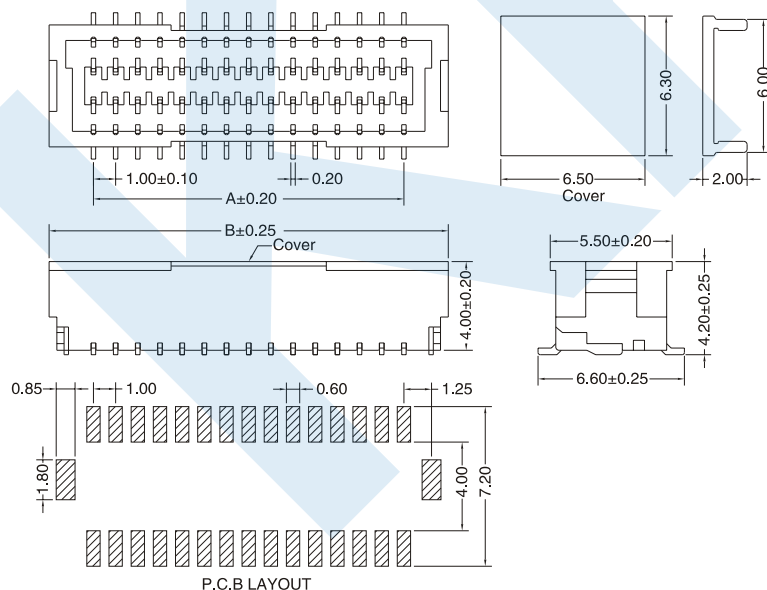

#### WAFER

- Part No.:KY-1007WS-XX
- Poles:20,30,40,50
- Material:Base:Nylon46 UL 94V-0
- Contact:Brass,Gold Finish
- Q'ty:1,000Pcs/Bag

#### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
20	KY-1007WS-20	9.00	13.00
30	KY-1007WS-30	14.00	18.00
40	KY-1007WS-40	19.00	23.00
50	KY-1007WS-50	24.00	28.00