
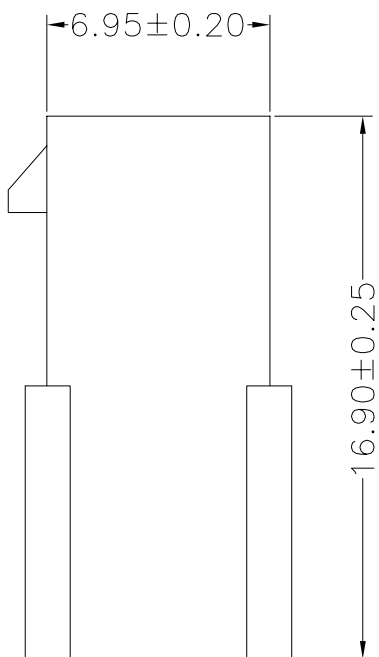
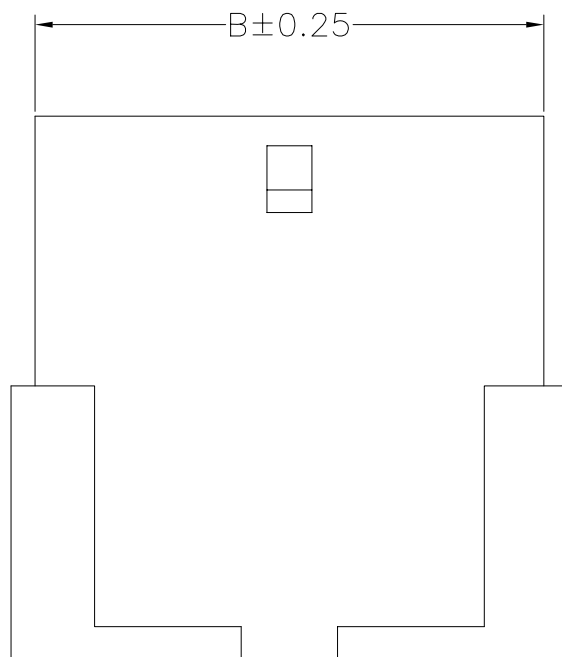


REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
B			


- Voltage rating: 250V AC/DC
- Current rating: 5A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 10m Ω Max.

- Part No.: KY-3002HD-XX
- Poles: 2*1-2*12
- Material: Nylon66 UL 94V-2
- Q' TY: 1000 Pcs/Bag

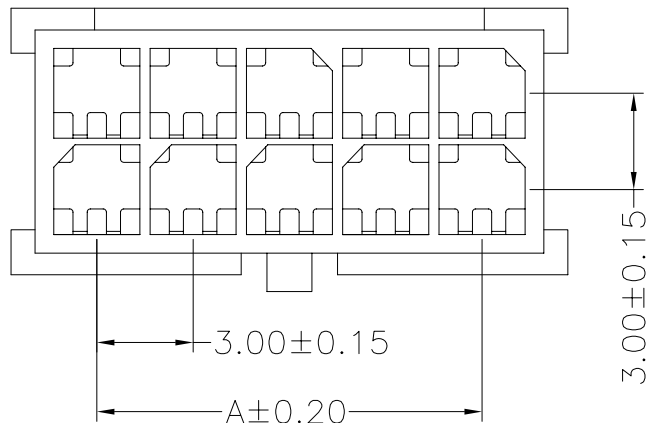

POLES	PART NO.	DIMENSION (mm)	
		A	B
2	KY-3002HD-02	\	3.85
4	KY-3002HD-04	3.00	6.85
6	KY-3002HD-06	6.00	9.85
8	KY-3002HD-08	9.00	12.85
10	KY-3002HD-10	12.00	15.85
12	KY-3002HD-12	15.00	18.85
14	KY-3002HD-14	18.00	21.85
16	KY-3002HD-16	21.00	24.85
18	KY-3002HD-18	24.00	27.85
20	KY-3002HD-20	27.00	30.85
22	KY-3002HD-22	30.00	33.85
24	KY-3002HD-24	33.00	36.85



绘图 (DRAWN)	高 雷	投影 (PROJECT)		公差 (TOLERANCE)	料 号 (PART NO)	KY-3002HD-XX	页 次 (PAGE)
审核 (CHECKED)		单位 (UNIT)	mm	0.0 ± 2°	图 号 (DRAW NO)	LJ1KY-3002HD-XX	1/1
		比例 (SCALE)	FIT	0.0 ± 0.30	品 名 (NAME)	3.00mm PITCH HOUSING	
		版本 (EDITION)	A	0.00 ± 0.20			
核准 (APPROVE)		日期 (DATE)	2009.9.21	0.000 ± 0.10			