
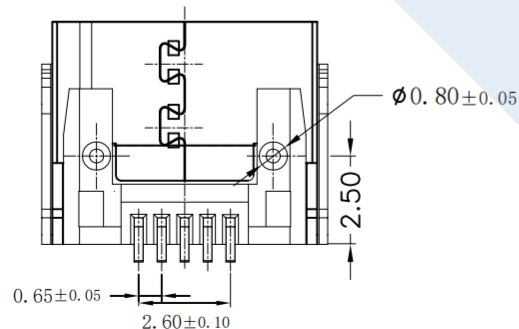
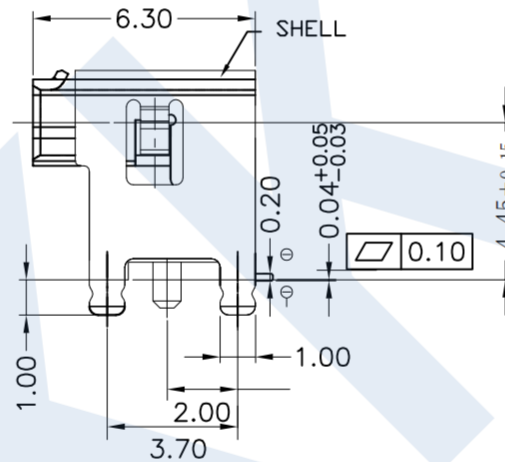
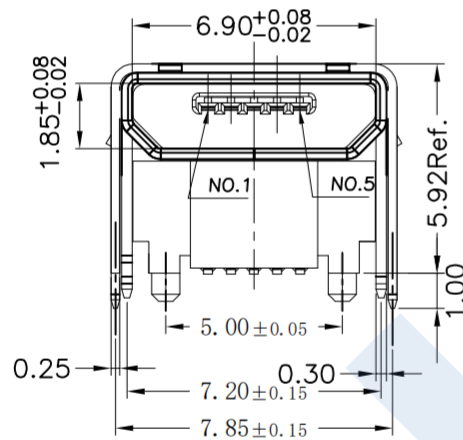
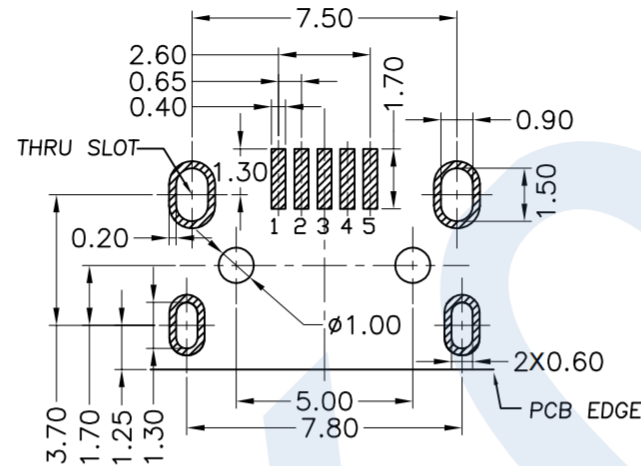


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

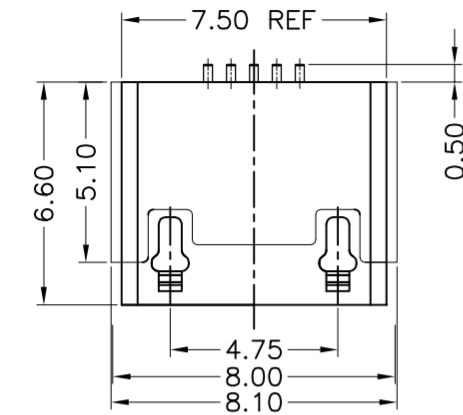

- MATERIAL**  
HOUSING: LCP,UL94V-0,BLACK  
CONTACT: COPPER ALLOY,T=0.20  
SHELL: STAINLESS STEEL,T=0.3  
COVER: STAINLESS STEEL,T=0.25
- FINISH**  
CONTACT: 50U" MIN NICKEL UNDERPLATING OVERALL  
GOLD PLATING SELECTIVE ON CONTACT AREA  
50U" MIN TIN PLATING ON SOLDER TAIL  
SHELL: 40U" MIN NICKEL UNDERPLATING OVERALL  
COVER: 40U" MIN NICKEL UNDERPLATING OVERALL
- ELECTRICAL**  
CURRENT: 1.0A  
VOLTAGE: 30V  
CONTACT RESISTANCE: 50 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
INSULATION RESISTANCE: 100 MEGOHMS MIN.
- MECHANICAL**  
MATING FORCE: 35N MAX.  
UNMATING FORCE: 10N MIN,INITIAL.  
8~20N AFTER 10000 CYCLES.  
DURABILITY: 10000 CYCLES
- PRODUCT NO. DESCRIPTION:**  
Contact Finish:  
00: Material 10: 10u"Gold  
01: G/F 15: 15u"Gold  
05: 5u"Gold 30: 30u"Gold

④	CONTACT	----	5	Copper Alloy T=0.20	Under plating: Ni plating Contact area: Gold flash plating Soldering area: Sn plating
③	SHELL	----	1	Stainless Steel T=0.25	1st:Cu, 2nd:NIPLATED
②	COVER	----	1	Stainless Steel T=0.25	1st:Cu, 2nd:NIPLATED
①	HOUSING	----	1	LCP(BLACK)	UL-94V-0

UNITS MM	SCALE 1:1				
		DR.	TITLE:		
GENERAL TOLERANCE		Lila	MICRO USB 5PF B型有柱垫高4.45四脚插板无卷边1.0版		
X. X ±0.30 X. X ±0.20 X. XX ±0.10 X. ° ±3° X. X° ±2°		CHK. Loran	MAT' L: 0018	DWG NO: USB-MK018HD	
		APPD. LIGUIYUAN	DATE: 2011.06.28	P	PART NO: SIZE A4