
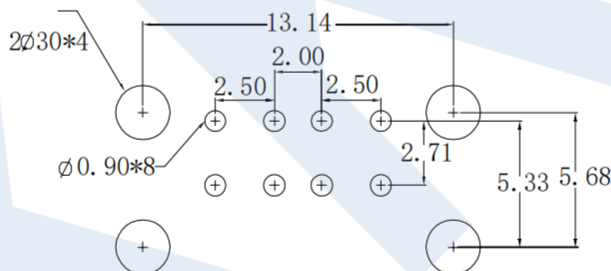
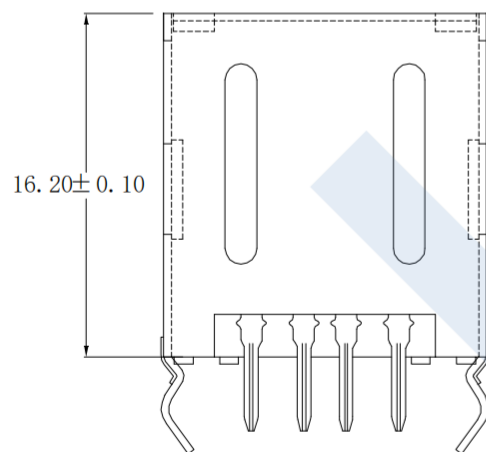
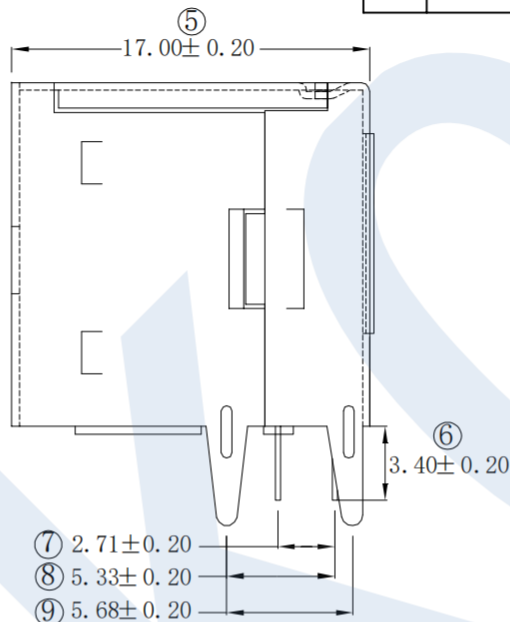


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

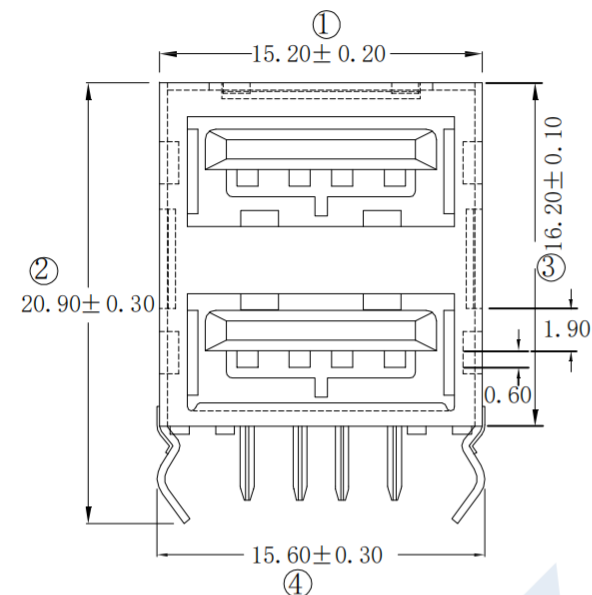

RECOMMENDED PCB LAYOUT

PCB图仅供参考

原材料Material:

1. 塑胶Housing: Hing Temperature thermoplastics, UL94v-0 PBT/LCP White/Black
2. 端子Contact: Copper Alloy C2680
3. 外壳Shell: Copper Alloy C2680/SPCC


规格说明Specification:

1. 额定电流Current rating: 1.0A/contact terminal
2. 额定电压Voltage Rating 30V DC
3. 接触阻抗Contact resistance: 30 milliohms MAX
4. 耐压Dielectric Withstanding Voltage 500 V AC For one minute
5. 绝缘阻抗Insulation resistance: 1000MEGA ohms MIN.
6. 插拔力Connector Mate and Unmate ForceMate force: 3.57kgf (MAX) Unmate force: 1.02kgf (MIN)
7. 端子保持力: Terminal Retention 0.5kgf (MIN)
8. 端子电镀Contact Electroplate: Piated Gold in Mating Area; Tin On Solder Talls
9. 外壳电镀Shell Electroplate; Nickel Plating

备注Note:

端子电镀: 01;Au1u"; 03;Au3u"; 05;Au5u"; 10;Au10u"; 15;Au15u"; 30;Au30u"

UNITS	SCALE
MM	1:1



GENERAL TOLERANCE	
X.	±0.30
X.X	±0.20
X.XX	±0.10
X.°	±3°
X.X°	±2°



DR.	Lila	TITLE: USB AF 90度DIP双层全包			
CHK.	Loran	DWG NO: USB-UI020Y		SIZE A4	
APPD.	LIGUIYUAN	DATE: 2011.06.28	P	PART NO:	