


#### SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 30mΩ Max.

#### KY-12510HS-XX 1.25mm Pitch Housing

#### HOUSING

- Part No.: KY-12510HS-XX
- Poles: 2–15
- Material: PBT UL 94V-0
- Q'ty: 1,000Pcs/Box

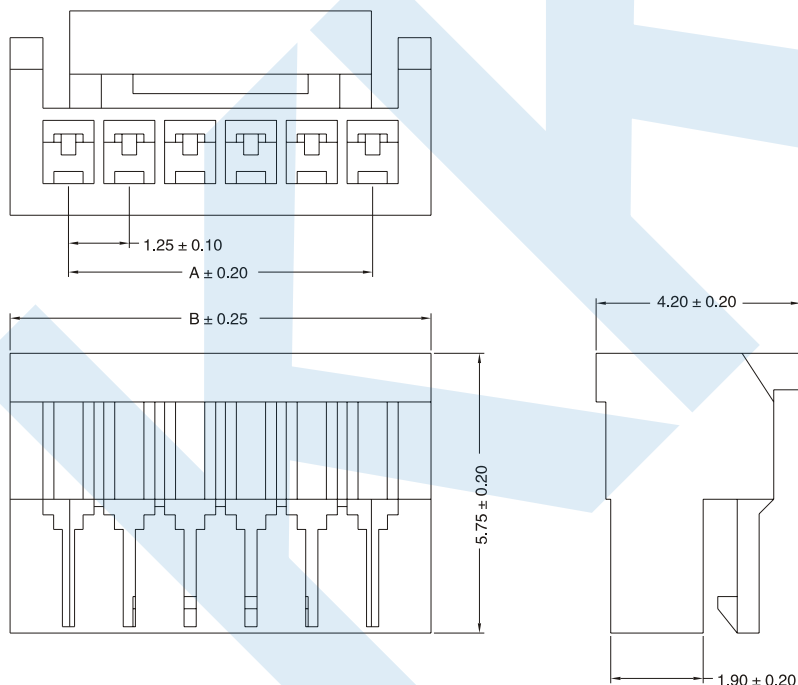

#### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-12510HS-02	1.25	3.65
3	KY-12510HS-03	2.50	4.90
4	KY-12510HS-04	3.75	6.15
5	KY-12510HS-05	5.00	7.40
6	KY-12510HS-06	6.25	8.65
7	KY-12510HS-07	7.50	9.90
8	KY-12510HS-08	8.75	11.15
9	KY-12510HS-09	10.00	12.40
10	KY-12510HS-10	11.25	13.65
11	KY-12510HS-11	12.50	14.90
12	KY-12510HS-12	13.75	16.15
13	KY-12510HS-13	15.00	17.40
14	KY-12510HS-14	16.25	18.65
15	KY-12510HS-15	17.50	19.90

### KY-12510TPS-10 1.25mm Pitch Terminal

#### TERMINAL

- Part No.:KY-12510TPS-10
- Thickness:0.12mm
- Material:Phosphor Bronze
- Finish:Tin Plated
- Q'ty:15,000Pcs/Reel

