


SPECIFICATIONS

- Voltage rating: 150V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.

KY-1255HS-XX 1.25mm Pitch Single Row Hosing

HOUSING

- Part No.: KY-1255HS-XX
- Poles: 2-15
- Material: Nylon 66 UL 94V-0
- Q'ty: 1,000Pcs/Bag

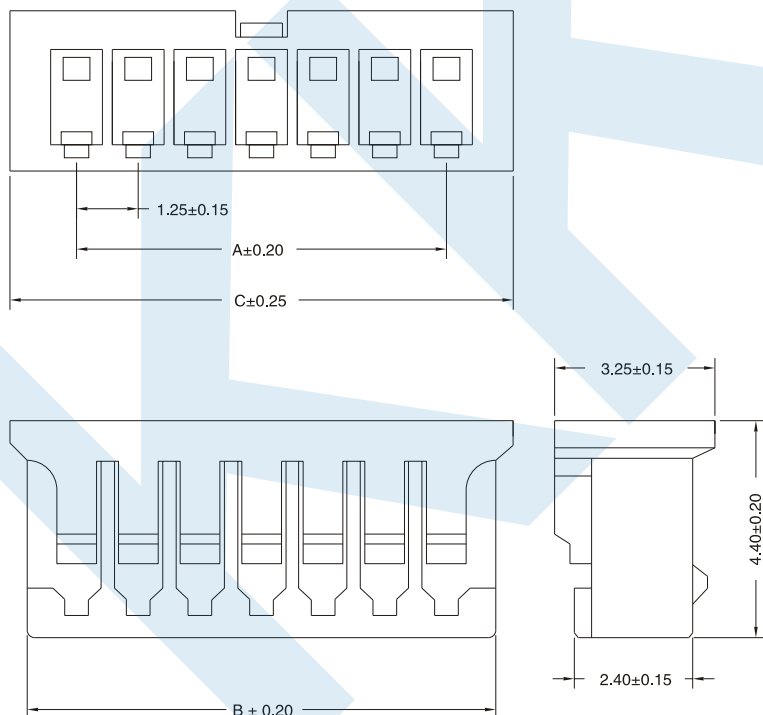

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)		
		A	B	C
2	KY-1255HS-02	1.25	3.25	3.95
3	KY-1255HS-03	2.50	4.50	5.20
4	KY-1255HS-04	3.75	5.75	6.45
5	KY-1255HS-05	5.00	7.00	7.70
6	KY-1255HS-06	6.25	8.25	8.95
7	KY-1255HS-07	7.50	9.50	10.20
8	KY-1255HS-08	8.75	10.75	11.45
9	KY-1255HS-09	10.00	12.00	12.70
10	KY-1255HS-10	11.25	13.25	13.95
11	KY-1255HS-11	12.50	14.50	15.20
12	KY-1255HS-12	13.75	15.75	16.45
13	KY-1255HS-13	15.00	17.00	17.70
14	KY-1255HS-14	16.25	18.25	18.95
15	KY-1255HS-15	17.50	19.50	20.20

KY-1255TPS-10 1.25mm Pitch Terminal

TERMINAL

- Part No.:KY-1255TPS-10
- Thickness:0.15mm
- Material:Phosphor Bronze
- Finish:Tin Plated
- Q'ty:15,000Pcs/Reel

