




SPECIFICATIONS

- Voltage rating: 125V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.


KY-1256HS-XX 1.25mm Pitch Single Row

HOUSING

- Part No.: KY-1256HS-XX
- Poles: 2-30
- Material: PBT UL 94V-0
- Q'ty: 1,000Pcs/Bag

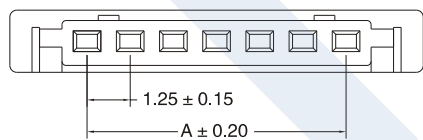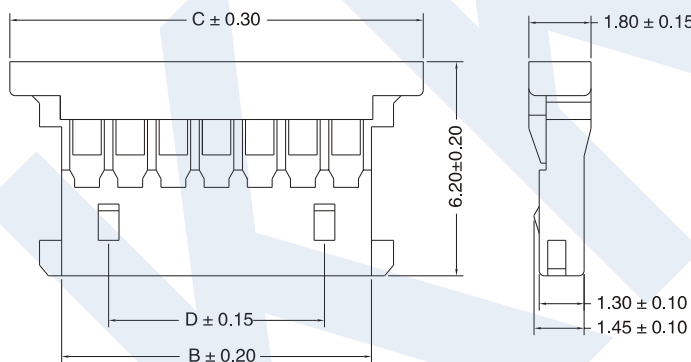

3 PIN 示意图




2 PIN 示意图

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)			
		A	B	C	D
2	KY-1256HS-02	1.25	2.72	5.72	/
3	KY-1256HS-03	2.50	3.97	6.97	/
4	KY-1256HS-04	3.75	5.22	8.22	2.50
5	KY-1256HS-05	5.00	6.47	9.47	3.75
6	KY-1256HS-06	6.25	7.72	10.72	5.00
7	KY-1256HS-07	7.50	8.97	11.97	6.25
8	KY-1256HS-08	8.75	10.22	13.22	7.50
9	KY-1256HS-09	10.00	11.47	14.47	8.75
10	KY-1256HS-10	11.25	12.72	15.72	10.00
11	KY-1256HS-11	12.50	13.97	16.97	11.25
12	KY-1256HS-12	13.75	15.22	18.22	12.50
13	KY-1256HS-13	15.00	16.47	19.47	13.75
14	KY-1256HS-14	16.25	17.72	20.72	15.00
15	KY-1256HS-15	17.50	18.97	21.97	16.25
16	KY-1256HS-16	18.75	20.22	23.22	17.50
18	KY-1256HS-18	21.25	22.72	25.72	20.00
20	KY-1256HS-20	23.75	25.22	28.22	22.50
22	KY-1256HS-22	26.25	27.72	30.72	22.50
24	KY-1256HS-24	28.75	30.22	33.22	22.50
26	KY-1256HS-26	31.25	32.72	35.72	22.50
28	KY-1256HS-28	33.75	35.22	38.22	22.50
30	KY-1256HS-30	36.25	37.72	40.72	22.50


KY-1256TPS-30 1.25mm Pitch Terminal

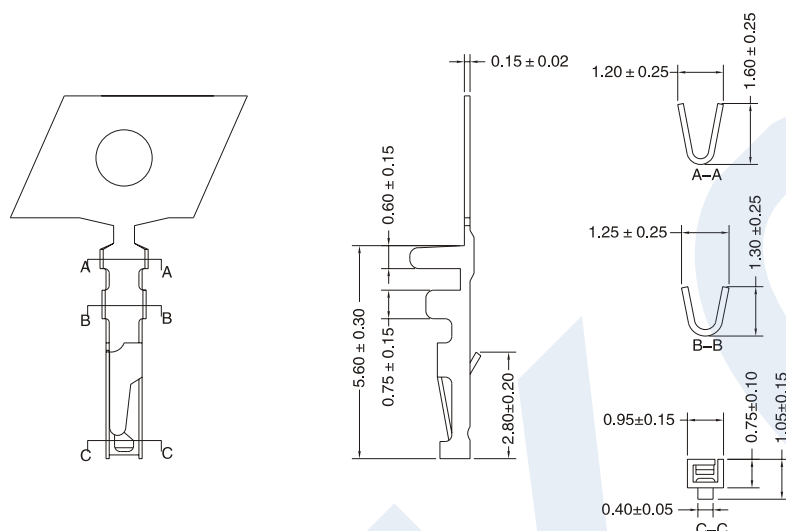

TERMINAL

- Part No.:KY-1256TPS-30
- Thickness:0.15mm
- Material:Phosphor Bronze
- Finish:Gold Plated
- Q'ty:15,000Pcs/Reel

KY-1256WR-XX 1.25mm Pitch 90° Single Row Wafer SMT Type

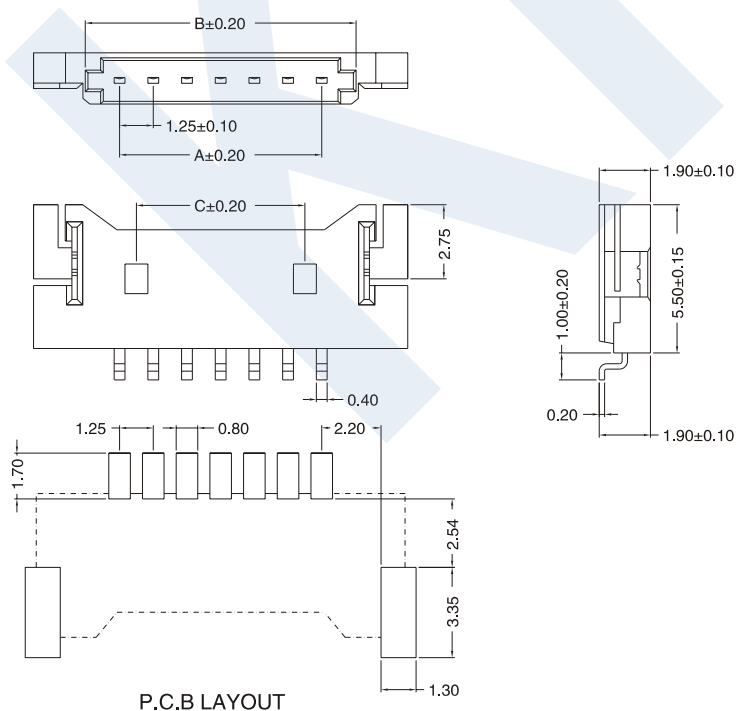

WAFER

- Part No.:KY-1256WR-XX
- Poles:2-30
- Material:Base:PA6T UL 94V-0
- Contact:Brass
- Finish:Tin Plated
- Q'ty:2,000Pcs/Tape&Reel

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)		
		A	B	C
2	KY-1256WR-02	1.25	3.80	/
3	KY-1256WR-03	2.50	5.05	/
4	KY-1256WR-04	3.75	6.30	2.50
5	KY-1256WR-05	5.00	7.55	3.75
6	KY-1256WR-06	6.25	8.80	5.00
7	KY-1256WR-07	7.50	10.05	6.25
8	KY-1256WR-08	8.75	11.30	7.50
9	KY-1256WR-09	10.00	12.55	8.75
10	KY-1256WR-10	11.25	13.80	10.00
...
20	KY-1256WR-20	23.75	26.30	22.50
...
30	KY-1256WR-30	36.25	38.80	35.00