


SPECIFICATIONS

- Voltage rating: 100V AC/DC
- Current rating: 0.8A AC/DC
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 500MΩ Min.
- Temperature range: -40 °C – +85 °C
- Contact resistance: 40mΩ Max.

KY-0505HS-XX 0.50mm Pitch Housing Single Row

HOUSING

- Part No.: KY-0505HS-40
- Poles: 40
- Material: LCP UL 94V-0
- Contact: Phosphor. Bronze
- Finish: Gold Plated
- Q'ty: 1,440 Pcs/Pizza Box

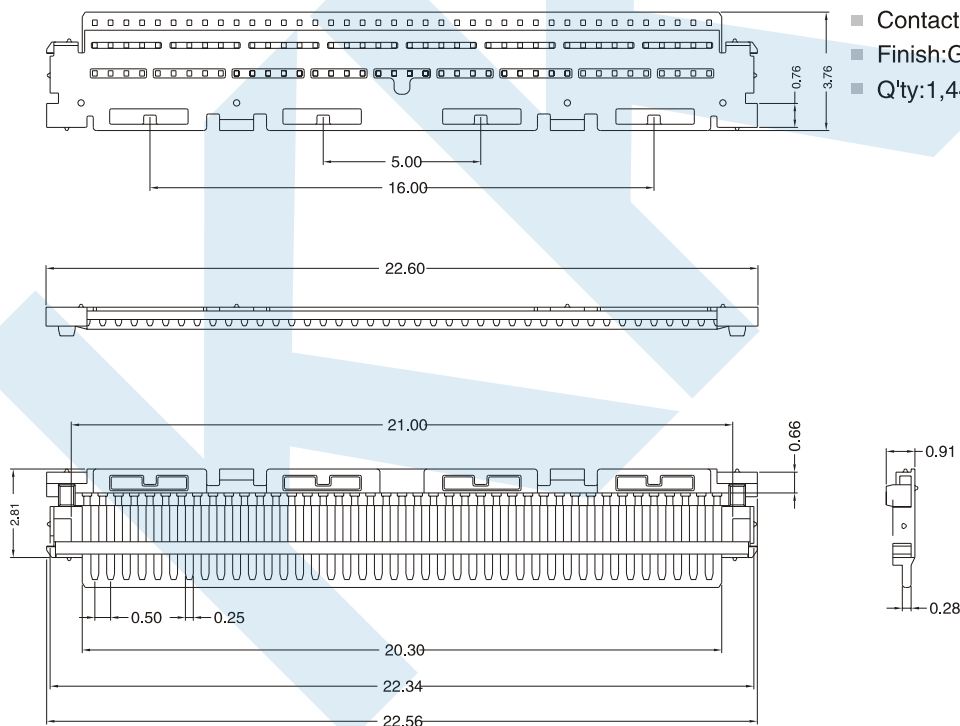

KY-0505HS-XX Outer Shell

OUTER SHELL

- Part NO.:KY-0505HS-40
- Thickness:0.12mm
- Material:Phosphor.Bronze
- Finish:Gold Plated
- Q'ty:6,000Pcs/Reel

