



SPECIFICATIONS

- Voltage rating: 100V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.

KY-1501HS-XX 1.50mm Pitch Housing

HOUSING


- Part No.: KY-1501HS-XX
- Poles: 2-15
- Material: Nylon 66 UL 94V-0
- Q'ty: 1,000Pcs/Bag

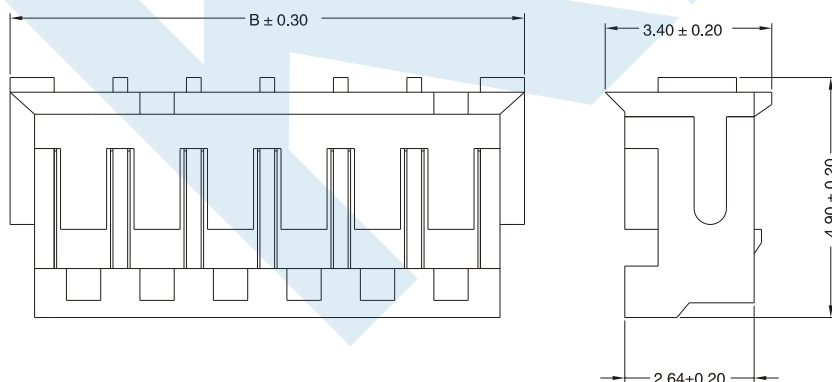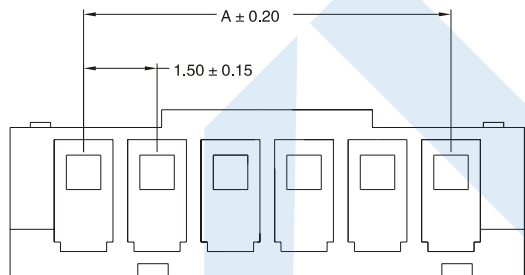

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-1501HS-02	1.50	4.50
3	KY-1501HS-03	3.00	6.00
4	KY-1501HS-04	4.50	7.50
5	KY-1501HS-05	6.00	9.00
6	KY-1501HS-06	7.50	10.50
7	KY-1501HS-07	9.00	12.00
8	KY-1501HS-08	10.50	13.50
9	KY-1501HS-09	12.00	15.00
10	KY-1501HS-10	13.50	16.50
11	KY-1501HS-11	15.00	18.00
12	KY-1501HS-12	16.50	19.50
13	KY-1501HS-13	18.00	21.00
14	KY-1501HS-14	19.50	22.50
15	KY-1501HS-15	21.00	24.00


KY-1501TPS-10 1.50mm Pitch Terminal

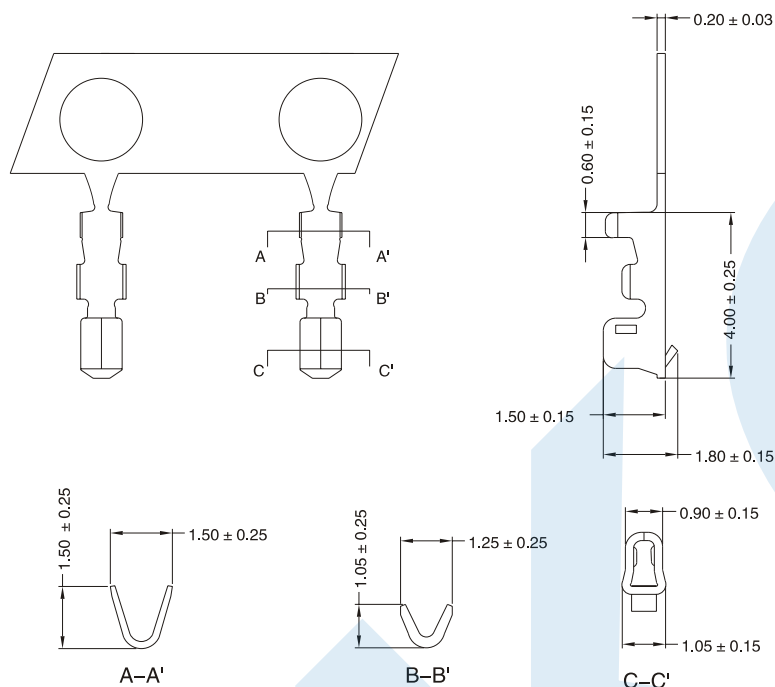

TERMINAL

- Part No.:KY-1501TPS-10
- Thickness:0.20mm
- Material:Phosphor Bronze
- Finish:Tin Plated

KY-1501WS-XX 1.50mm Pitch 180° Wafer

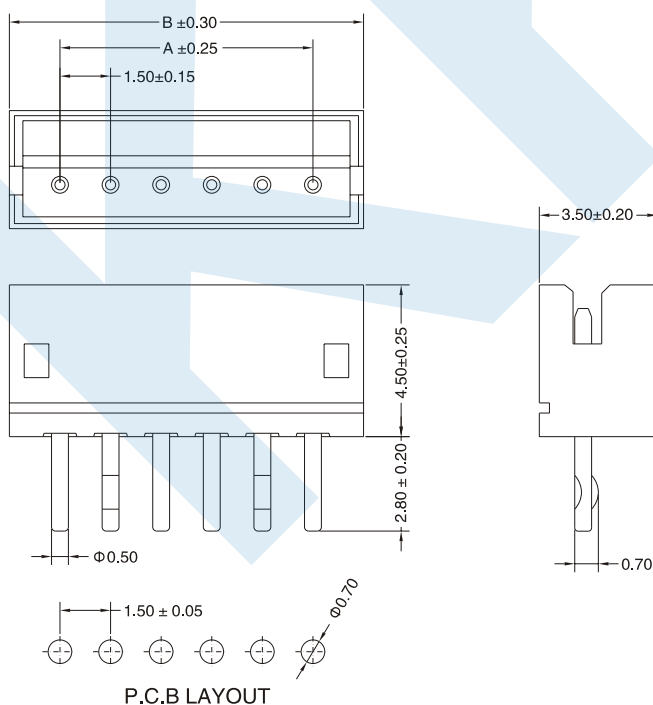


WAFER

- Part No.:KY-1501WS-XX
- Poles:2-16
- Material:Base:Nylon 66 UL 94V-0
- Contact:Brass, Tin Plated
- Q'ty:1,000Pcs/Bag

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-1501WS-02	1.50	4.50
3	KY-1501WS-03	3.00	6.00
4	KY-1501WS-04	4.50	7.50
5	KY-1501WS-05	6.00	9.00
6	KY-1501WS-06	7.50	10.50
7	KY-1501WS-07	9.00	12.00
8	KY-1501WS-08	10.50	13.50
9	KY-1501WS-09	12.00	15.00
10	KY-1501WS-10	13.50	16.50
11	KY-1501WS-11	15.00	18.00
12	KY-1501WS-12	16.50	19.50
13	KY-1501WS-13	18.00	21.00

KY-1501WR-XX 1.50mm Pitch 90° Wafer

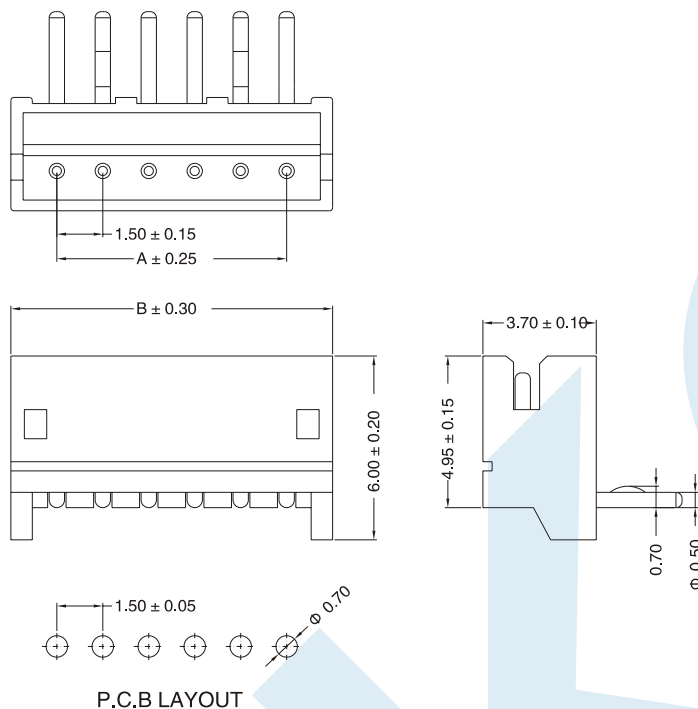


WAFER

- Part No.:KY-1501WR-XX
- Poles:2-16
- Material:Base:Nylon 66 UL 94V-0
- Contact:Brass, Tin Plated
- Q'ty:1,000Pcs/Bag

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-1501WR-02	1.50	4.50
3	KY-1501WR-03	3.00	6.00
4	KY-1501WR-04	4.50	7.50
5	KY-1501WR-05	6.00	9.00
6	KY-1501WR-06	7.50	10.50
7	KY-1501WR-07	9.00	12.00
8	KY-1501WR-08	10.50	13.50
9	KY-1501WR-09	12.00	15.00
10	KY-1501WR-10	13.50	16.50
11	KY-1501WR-11	15.00	18.00
12	KY-1501WR-12	16.50	19.50
13	KY-1501WR-13	18.00	21.00

KY-1501WSS-XX 1.50mm Pitch 180° Wafer SMT Type

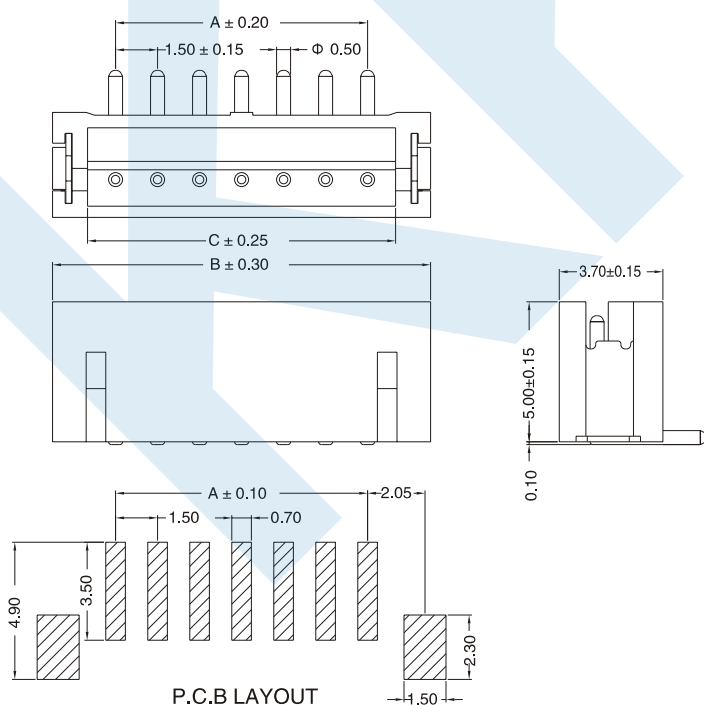

WAFER

- Part No.:KY-1501WSS-XX
- Poles:2-13
- Material:Base:Nylon 6T UL 94V-0
- Contact:Brass, Tin Plated
- Q'ty:1,000Pcs/Bag



Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)		
		A	B	C
2	KY-1501WSS-02	1.50	6.00	3.50
3	KY-1501WSS-03	3.00	7.50	5.00
4	KY-1501WSS-04	4.50	9.00	6.50
5	KY-1501WSS-05	6.00	10.50	8.00
6	KY-1501WSS-06	7.50	12.00	9.50
7	KY-1501WSS-07	9.00	13.50	11.00
8	KY-1501WSS-08	10.50	15.00	12.50
9	KY-1501WSS-09	12.00	16.50	14.00
10	KY-1501WSS-10	13.50	18.00	15.50
11	KY-1501WSS-11	15.00	19.50	17.00
12	KY-1501WSS-12	16.50	21.00	18.50
13	KY-1501WSS-13	18.00	22.50	20.00

KY-1501WRS-XX 1.50mm Pitch 90° Wafer SMT Type

WAFER

- Part No.:KY-1501WRS-XX
- Poles:2-13
- Material:Base:PA6T UL 94V-0
- Contact:Brass,Tin Plated
- Q'ty:1,000Pcs/Bag

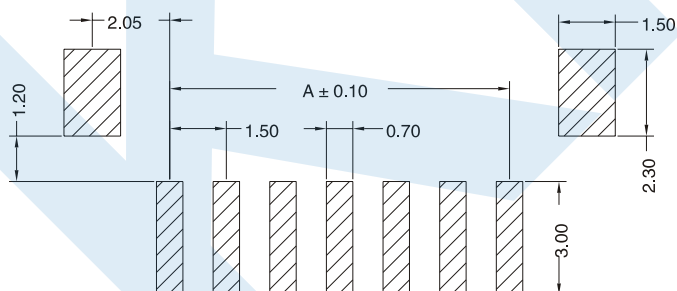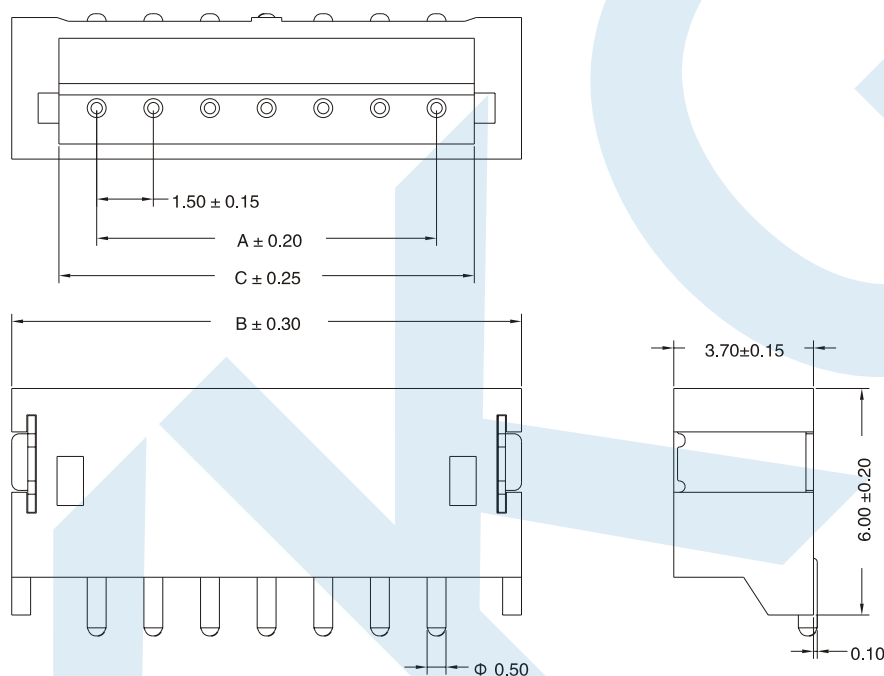

P.C.B LAYOUT

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)		
		A	B	C
2	KY-1501WRS-02	1.50	6.00	3.50
3	KY-1501WRS-03	3.00	7.50	5.00
4	KY-1501WRS-04	4.50	9.00	6.50
5	KY-1501WRS-05	6.00	10.50	8.00
6	KY-1501WRS-06	7.50	12.00	9.50
7	KY-1501WRS-07	9.00	13.50	11.00
8	KY-1501WRS-08	10.50	15.00	12.50
9	KY-1501WRS-09	12.00	16.50	14.00
10	KY-1501WRS-10	13.50	18.00	15.50
11	KY-1501WRS-11	15.00	19.50	17.00
12	KY-1501WRS-12	16.50	21.00	18.50
13	KY-1501WRS-13	18.00	22.50	20.00