




# NOTES

## 1.MATERIALS:


HOUSING-PBT UL 94V-0,  
TERMINAL-PHOSPHOR BRONZE.

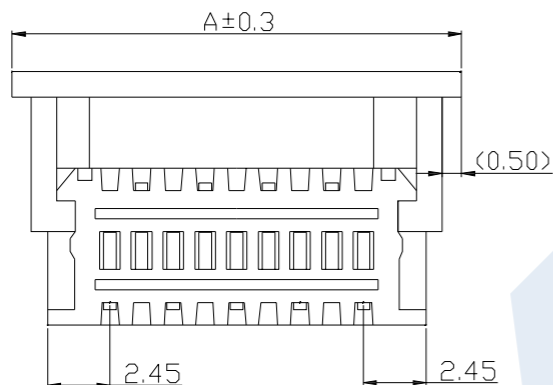

FFC/FPC DIMENSION  
THICKNESS 0.3±0.05mm

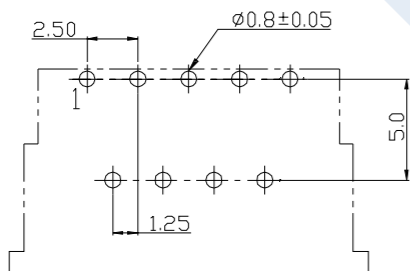

RECOMMEND PCB LAYOUT  
COMPONENT SIDE  
(FOR:GS15-XX1XAW)

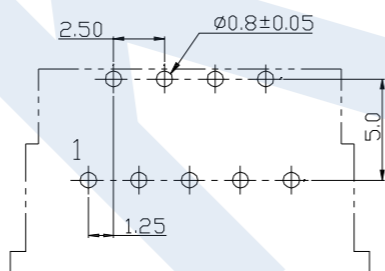

RECOMMEND PCB LAYOUT  
COMPONENT SIDE  
(FOR:GS15-XX1XA)

CKT	PART NO	A	B
3	GS15-031XAX	9.55	5.20
4	GS15-041XAX	10.80	6.45
5	GS15-051XAX	12.05	7.70
6	GS15-061XAX	13.30	8.95
7	GS15-071XAX	14.55	10.20
8	GS15-081XAX	15.80	11.45
9	GS15-091XAX	17.05	12.70
10	GS15-101XAX	18.30	13.95
11	GS15-111XAX	19.55	15.20
12	GS15-121XAX	20.80	16.45
13	GS15-131XAX	22.05	17.70
14	GS15-141XAX	23.30	18.95
15	GS15-151XAX	24.55	20.20
16	GS15-161XAX	25.80	21.45
17	GS15-171XAX	27.05	22.70
18	GS15-181XAX	28.30	23.95
19	GS15-191XAX	29.55	25.20
20	GS15-201XAX	30.80	26.45
21	GS15-211XAX	32.05	27.70
22	GS15-221XAX	33.30	28.95
23	GS15-231XAX	34.55	30.20
24	GS15-241XAX	35.80	31.45
25	GS15-251XAX	37.05	32.70
26	GS15-261XAX	38.30	33.95
27	GS15-271XAX	39.55	35.20
28	GS15-281XAX	40.80	36.45
29	GS15-291XAX	42.05	37.70
30	GS15-301XAX	43.30	38.95
31	GS15-311XAX	44.55	40.20
32	GS15-321XAX	45.80	41.45

UNITS  
mm

MAT'L

FINISH

Q'TY

PCS

X.± 0.3	X°.± 5°
.X± 0.25	.X°.± 2°
.XX± 0.20	.XX°.± 1°
.XXX± 0.10	.XXX°.± 0.5°

**KKG**

PART NO.(INTENDED USE)

GS15-\*\*\*XAX

APPD:

CHKD:


DR: HU 2016.09.28

TITLE:

1.25带锁弯插FPC连接器

DWG NO.:

1.25-J-nPW



SCALE

1/1

SHEET

1/1

REV.

A