


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

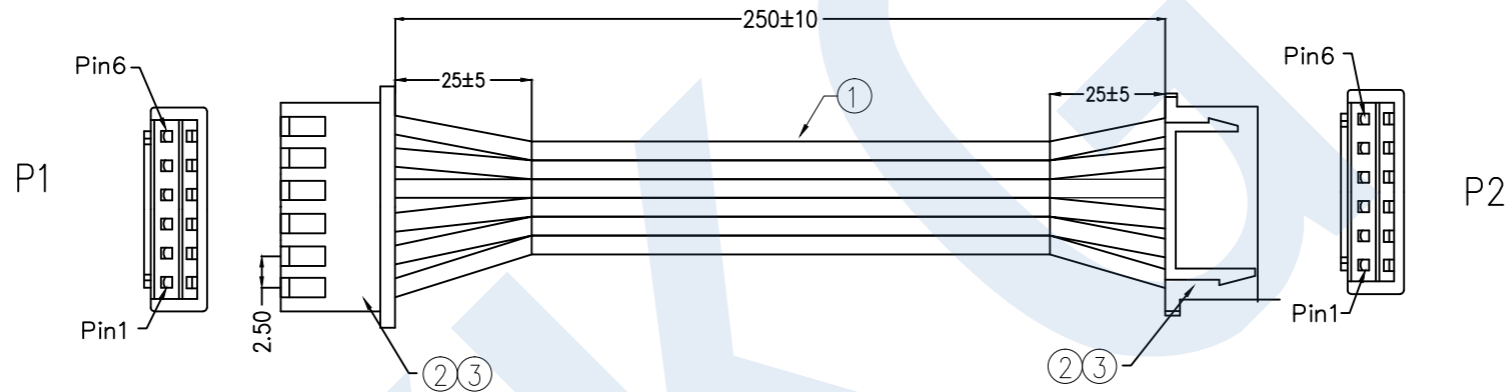

#### PIN ASSIGNMENT

P1		P2
PIN1	Red	PIN1
PIN2	Orange	PIN2
PIN3	Yellow	PIN3
PIN4	Green	PIN4
PIN5	Blue	PIN4
PIN6	Purple	PIN6

#### Electrical



1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

#### Packing specification

25pcs/Bundle, 200pcs/Bag

\* Note: All Materials Meet The "RoHs" !

3	Wire to board terminal 2.5mm Female(Tin-Plated): T25001-F2H
2	Wire to board housing 2.5mm 6Circuits: HG25001-S06M2W1B
1	UL1007 26AWG(7/0.16TS) OD=1.30mm Flat Cable (Red/Orange/Yellow/Green/Blue/Purple)
NO.	Specification

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 23/SEP/19	PART NO. CAE-448	ITEM NO. CAE-448		
DESIGN UNITS Metric		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Single Conductor Cable		REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°	CHERRY	23/SEP/19				
		SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY Aubrey	DATE 23/SEP/19		
		X.XXX ±0.10	X.XXX* ±0.5°						