


## PITCH 1.25mm FPC CONNECTORS

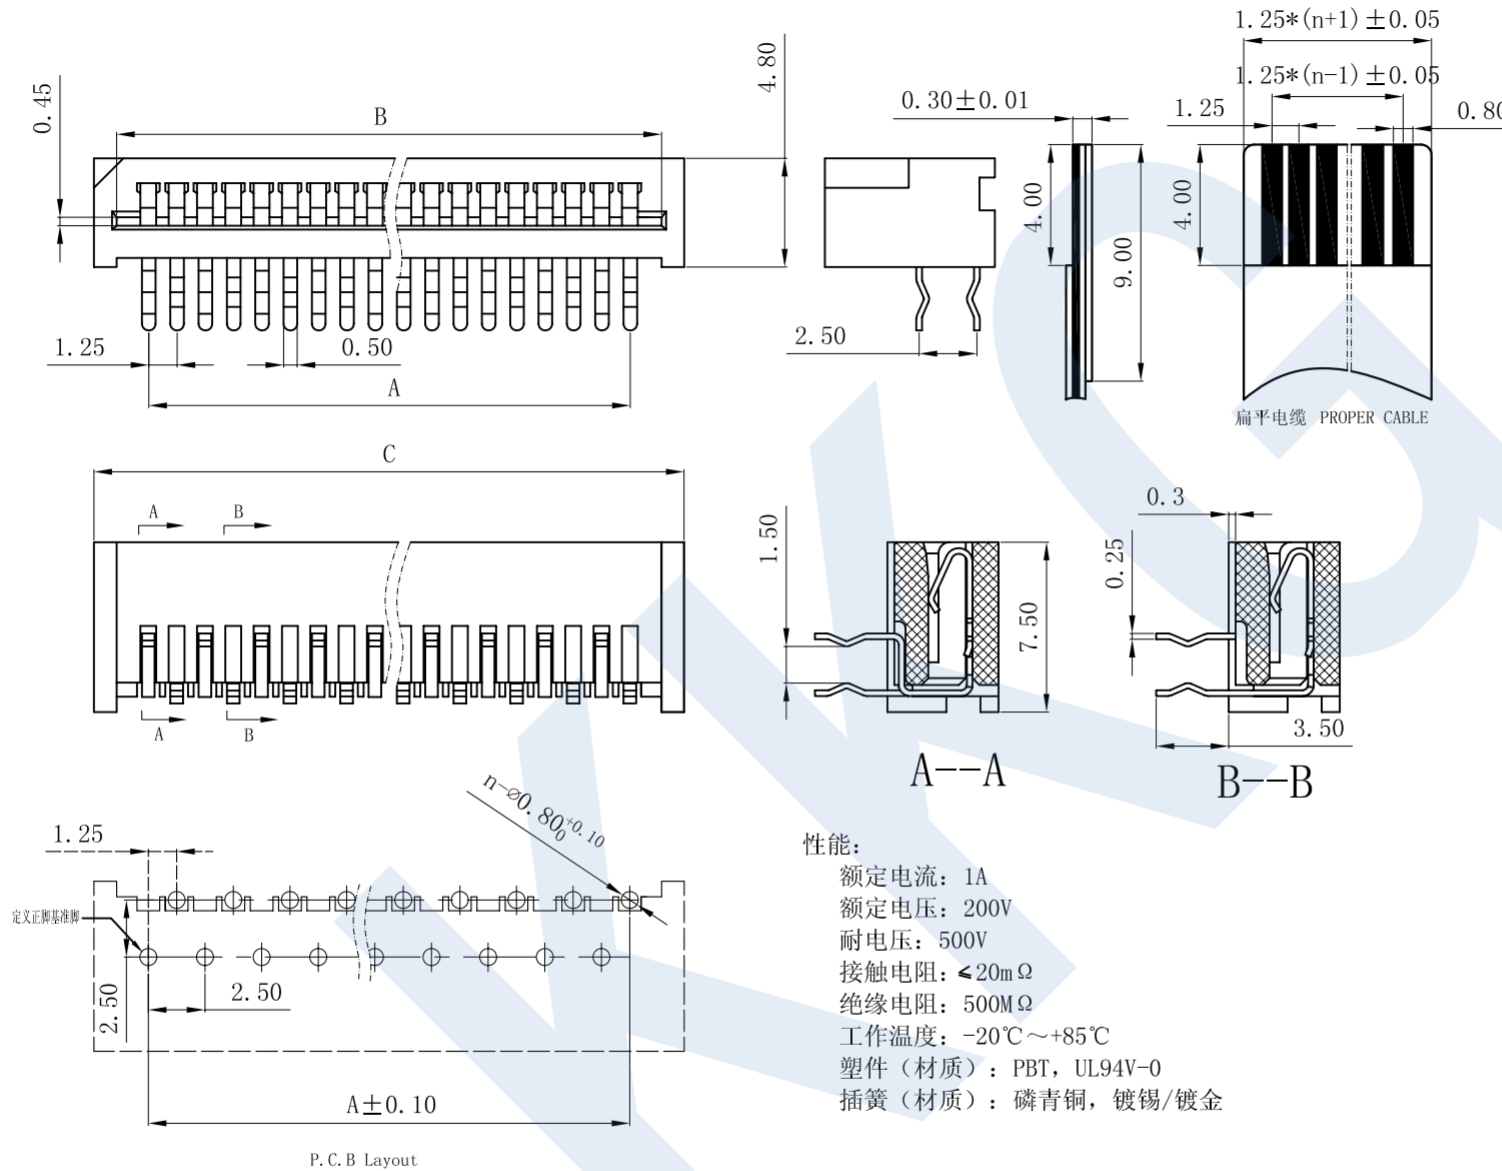

性能:

额定电流: 1A

额定电压: 200V

耐电压: 500V

接触电阻: ≤20mΩ



绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件(材质): PBT, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金

孔位	A	B	C
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05
31	37.50	40.00	42.30
32	38.75	41.25	43.55
33	40.00	42.50	44.80
34	41.25	43.75	46.05
35	42.50	45.00	47.30
36	43.75	46.25	48.55
37	45.00	47.50	49.80
38	46.25	48.75	51.05
39	47.50	50.00	52.30
40	48.75	51.25	53.55

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)				
.X ± 0.25	.X.° ± 2°	MAT' L	1. 25mm FPC (A型) 弯插 (正脚)				
.XX ± 0.20	.XX.° ± 1°	FINISH	PART NO. (INTENDED USE)	TITLE:			
.XXX ± 0.10	.XXX.° ± 0.5°		1. 25-A-nPW	1. 25mm FPC (A型) 弯插 (正脚)			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			APPD:	DWG NO. :			
		Q' TY	CHKD:	125N03-AUH0000000			
		DR: YLZ 2011.09.28			SCALE	SHEET	REV.
				1/1	1/1	A	