
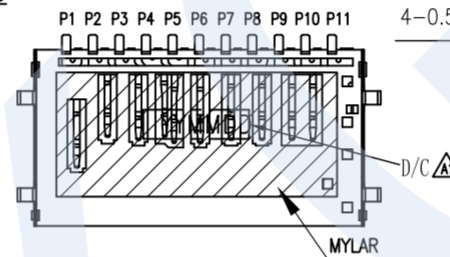




RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0	ECN1801006	△A0 开关PIN加宽, 改善电测下趴	2018.01.15	SUPER	HFL	YONG
A1	ECN1805002	△A1 根据客户要求变更DC	2018.05.03	SUPER	HFL	YONG

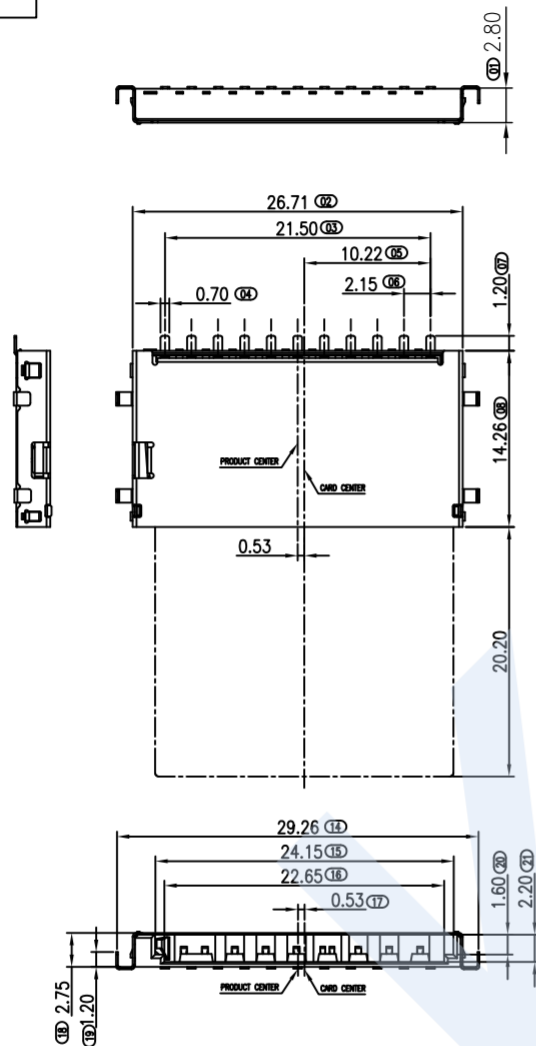

△A1 △A0 喷码说明: YYMMDD

- 01: 第一日
- 31: 第31日
- 01: 1月
- 12: 12月
- 17: 2017年

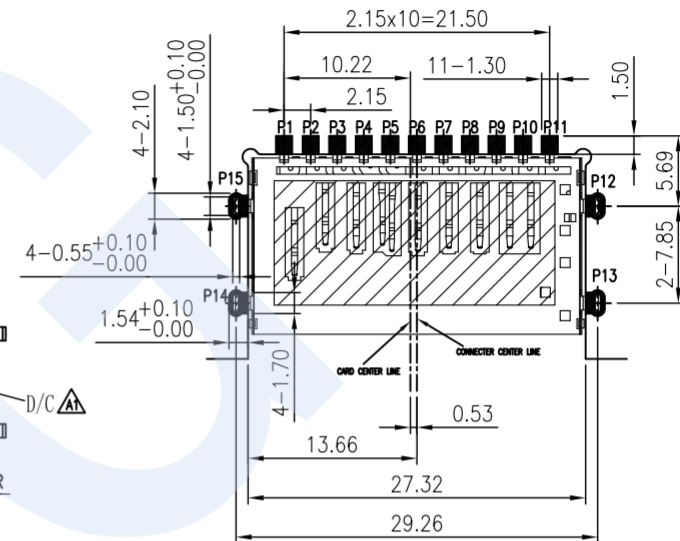

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05

▨ PAD

Pin Define

Connector Pin No.	SD Card Pin No.	Pin Define
P1	P9	DAT2
P2	P1	DAT3
P3	P2	CMD
P4		CD
P5	P3	VSS1
P6	P4	VDD
P7	P5	CLK
P8	P6	VSS2
P9	P7	DAT0
P10	P8	DAT1
P11		WP
P12~P15		GND

WITHOUT CARD	CARD INSERTED:LOCK	CARD INSERTED:UNLOCK
W/P GND	W/P GND	W/P GND
C/D VSS1	C/D VSS1	C/D VSS1
P3	P3	P3

NOTES:

1.MATERIAL

- 1.1 HOUSING: LCP S475 UL94 V-0,BLACK COLOR.
- 1.2 SHELL:STAINLESS STEEL SUS304.
- 1.3 CONTACT:COPPER ALLOY C5210.


2.FINISH:

- 2.1 CONTACT :GOLD PLATED ON CONTACT AREA, MATTE TIN 100u" MIN ON SOLDERTAIL AREA. 50u"MIN NICKEL PLATING OVERALL.
- 2.2 SHELL: 30u" MIN SOLDERABLE NICKEL PLATING OVERALL



MILLIMETERS	INCH	UNITS	KKG		
X° ± 2°	X° ± 2°	MM			
.X ± 0.38	.XX ± 0.015	MAT'L	PART NUMBER:		TITLE: SD 短体反向沉板2.75
.XX ± 0.25	.XXX ± 0.010	SEE NOTES			
.XXX ± 0.10	.XXXX ± 0.004	FINISH	APPD:		DWG NO.:
		SEE NOTES			
		QTY	CHKD:		SCALE
		SEE NOTES			
			DR:		SHEET
					REV.

RoHS


客户拉出方向



客户拉出方向

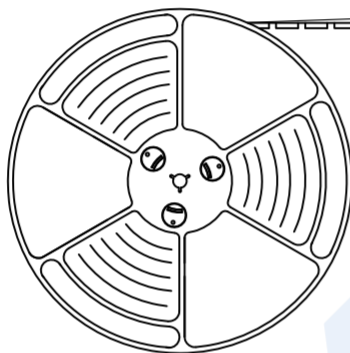


6 Reels

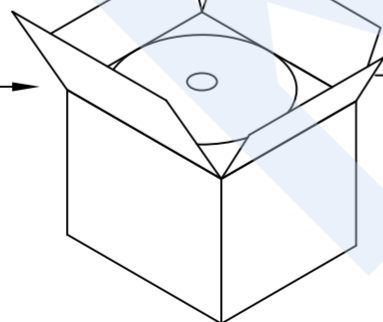

外箱


将6卷产品放入箱内




封箱胶带

NOTES

- 1.每卷包装数量:600PCS/每卷
- 2.卷带包装方式:

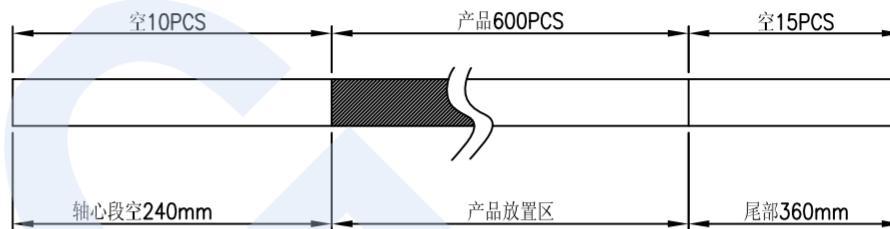

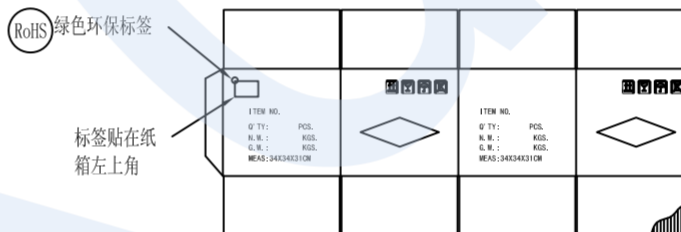

- 3.每箱包装数量:3600PCS/箱



RoHS 绿色环保标签

标签贴在纸箱左上角

纸箱示意图

MILLIMETERS	INCH	UNITS				
X° ± 2°	X° ± 2°	MAT'L				
.X ± 0.38	.XX ± 0.015	SEE NOTES	PART NUMBER:	TITLE: SD 短体反向沉板 2.75		
.XX ± 0.25	.XXX ± 0.010	FINISH				
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	APPD:	DWG NO.:		
			CHKD:			
			DR:			
				1:1	2/2	A1

KKG

SD 短体反向沉板2.75