
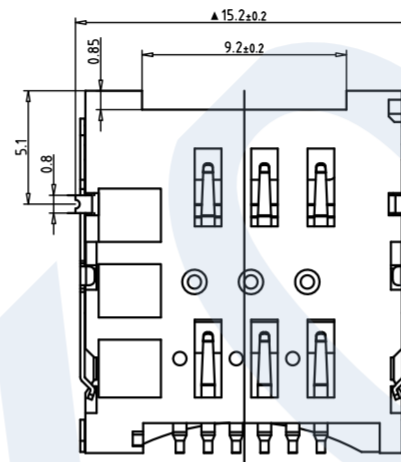


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	YZZ		HAIYONG


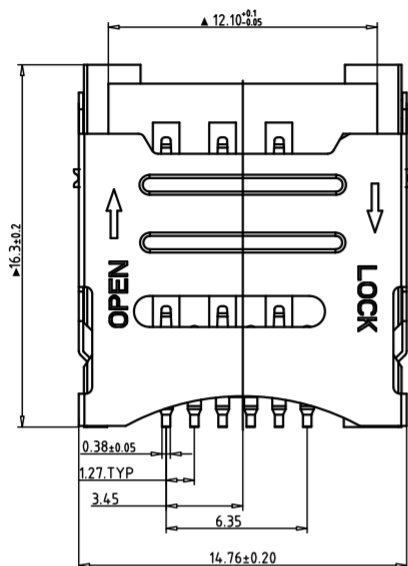


#### 一、材质和镀涂:


- 1、胶芯: LCP, UL 94 V - 0, 黑色
- 2、端子: 磷铜C5191-H, T=0.15, 镍底镀金
- 3、外壳: 不锈钢 SUS304 T=0.2

#### 二、技术参数:

接触电阻: 100mΩ Max  
绝缘阻抗: 1000MΩ Min(500DC)  
额定电流: 每个接触件1A Max  
额定电压: 30V Max(DC)  
耐压: 500V r.m.s/min  
使用温度: -40℃~85℃  
湿度: 90%~95%  
寿命: >3000次

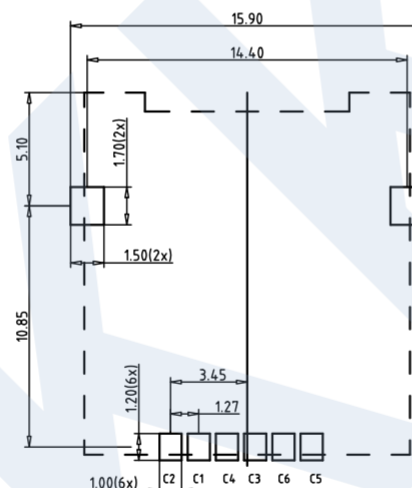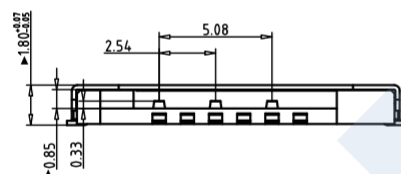



PCB LAYOUT

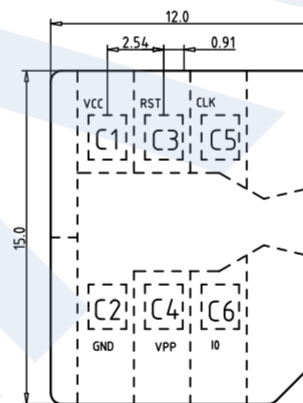

MICRO SIM

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O



MILLIMETERS	INCH	UNITS	MM		
X° ± 2°	X° ± 2°	MAT'L			
.X ± 0.20	.XX ± 0.012	SEE NOTES		PART NUMBER:	TITLE:
.XX ± 0.10	.XXX ± 0.008	FINISH		APPD: HAIYONG	DWG NO.:
.XXX ± 0.05	.XXXX ± 0.008	SEE NOTES		CHKD: --	
		QTY		DR: YZZ	
		SEE NOTES			

SCALE	SHEET	REV.
1:1	1/2	A0