

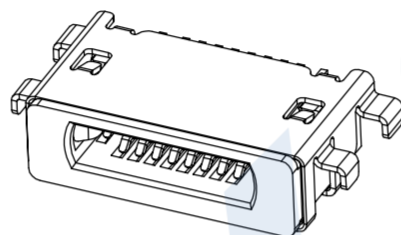
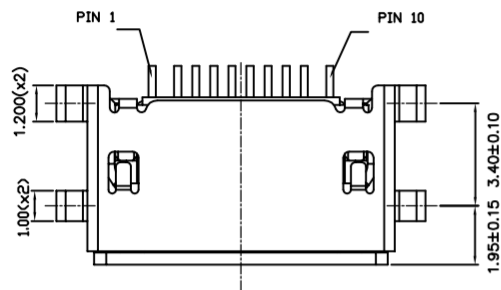


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.



3D VIEW

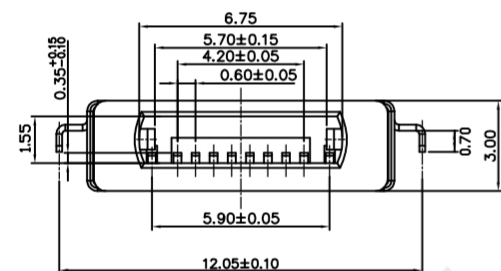

PIN NO.	SIGNAL
PIN 1#	DETECT1
PIN 2#	SCC1
PIN 3#	DP1
PIN 4#	DN1
PIN 5#	PWR A
PIN 6#	PWR B
PIN 7#	DN2
PIN 8#	DP2
PIN 9#	ACC2
PIN 10#	DETECT2
SHELL	GND

备注:

1. 材质:

1.1 胶芯: LCP UL94V-0;

1.2 端子: 磷青铜, 镍底, 镀金 μ ;

1.3 外壳: 不锈钢, 镀锡100 μ ", 镍底30 μ "以上;

2. 主要特性:

2.1 额定电流0.5A;

2.2 接触阻抗: 30m Ω MAX;

2.3 绝缘阻抗: 100M Ω MIN 250V DC;

2.4 耐压测试: 250V AC

2.5 沾锡性: 温度235 \pm 5 $^{\circ}$ C, 时间5 \pm 0.5s;

2.6 退PIN力: 0.5kgf MIN;

2.7 整体插入力: 3.57kgf MAX

整体拔出力: 1.00kgf MIN;


2.8 使用寿命: 5000次;

2.9 耐温性: 烤箱测试: 温度250 \pm 5 $^{\circ}$ C, 时间2分钟;

2.10 工作温度: -30 $^{\circ}$ C \sim +80 $^{\circ}$ C.




UNITS	SCALE				
MM	1:1				
		DR.		TITLE:	
		Lila		苹果10PIN母座短体沉板2.0H无头(4DIP型)	
		CHK.		MAT'L:	
		Loran		DWGNO:	
		APPD.		DATE:	
		LIGUIYUAN		2011.06.28	
				PARTNO:	
				SIZE	
				A4	



GENERAL TOLERANCE

X.	± 0.30
X.X	± 0.20
X.XX	± 0.10
X. $^{\circ}$	$\pm 3^{\circ}$
X.X $^{\circ}$	$\pm 2^{\circ}$

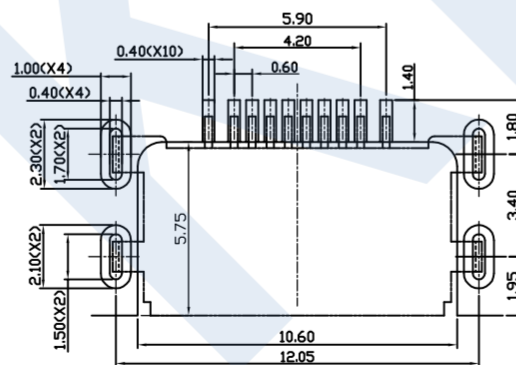

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ± 0.05