

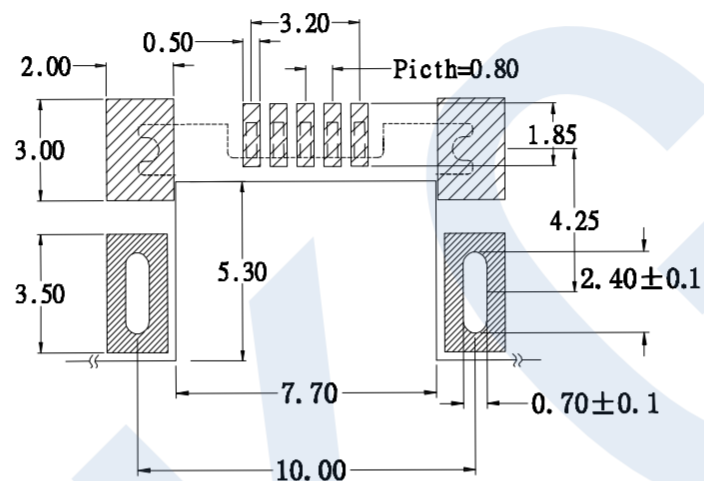
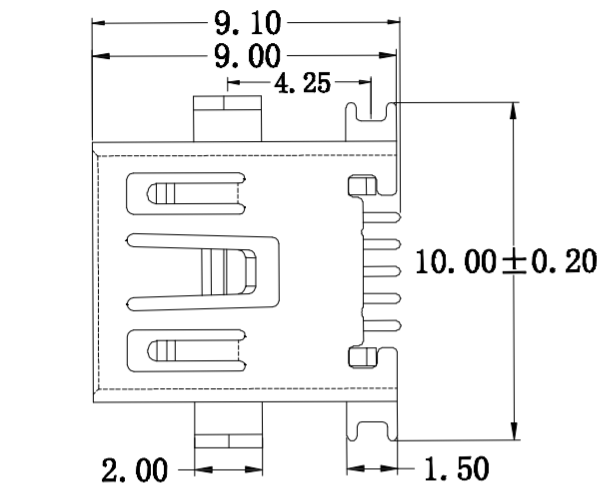
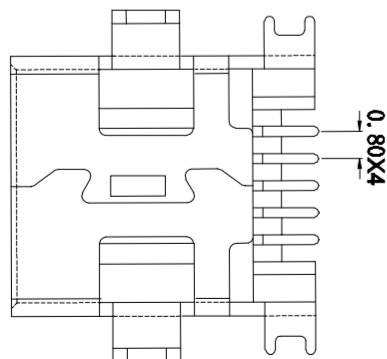
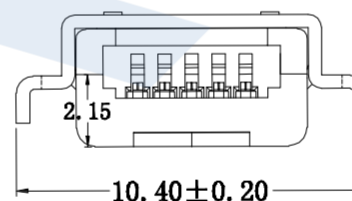


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

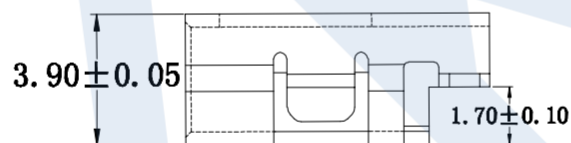

RECOMMENDED PCB LAYOUT
PCB图仅供参考

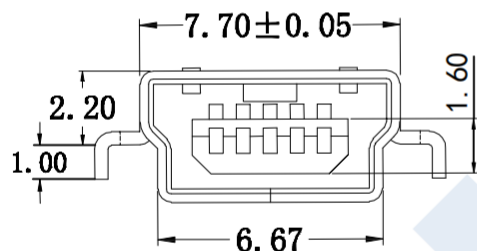

原材料Material:

1. 塑胶Housing: Hing Temperature thermoplastics, UL94v-0 LCP Black
2. 端子Contact: Copper Alloy C5191
3. 外壳Shell: Copper Alloy C2680/

规格说明Specification:

1. 额定电流Current rating: 1.0A/contact terminal
2. 额定电压Voltage Rating 30V DC
3. 接触阻抗Contact resistance: 30 milliohms MAX
4. 耐电压Dielectric Withstanding Voltage 500 V AC For one minute
5. 绝缘阻抗Insulation resistance: 1000MEGA ohms MIN.
6. 插拔力Connector Mate and Unmate
ForceMate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
7. 端子保持力: Terminal Retention 0.5kgf (MIN)
8. 端子电镀Contact Electroplate: Plated Gold in Mating Area; Tin On Solder Tails
9. 外壳电镀Shell Electroplate: Nickel Plating

备注Note:

端子电镀: 01;Au1u"; 03;Au3u"; 05;Au5u"
10;Au10u"; 15;Au15u"; 30;Au30u"
主体颜色: 黑色(灰色LCP料)

UNITS MM	SCALE 1:1				
 GENERAL TOLERANCE X. ±0.30 X.X ±0.20 X.XX ±0.10 X.° ±3° X.X° ±2°		DR.	TITLE: Lila MINI USB 5PF B型沉板1.7前插后贴		
		CHK.	Loran		DWG NO: USB-MG011Y
		APPD.	LIGUIYUAN		PART NO:
			DATE: 2011.06.28	P	SIZE A4