
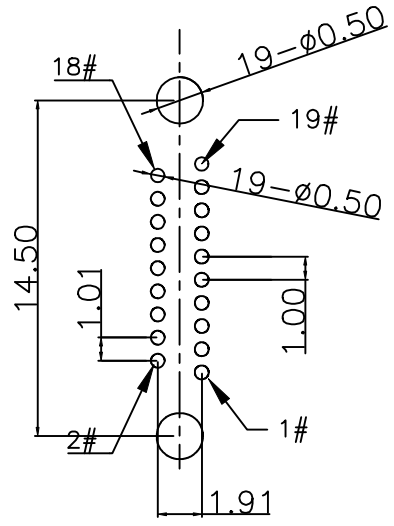
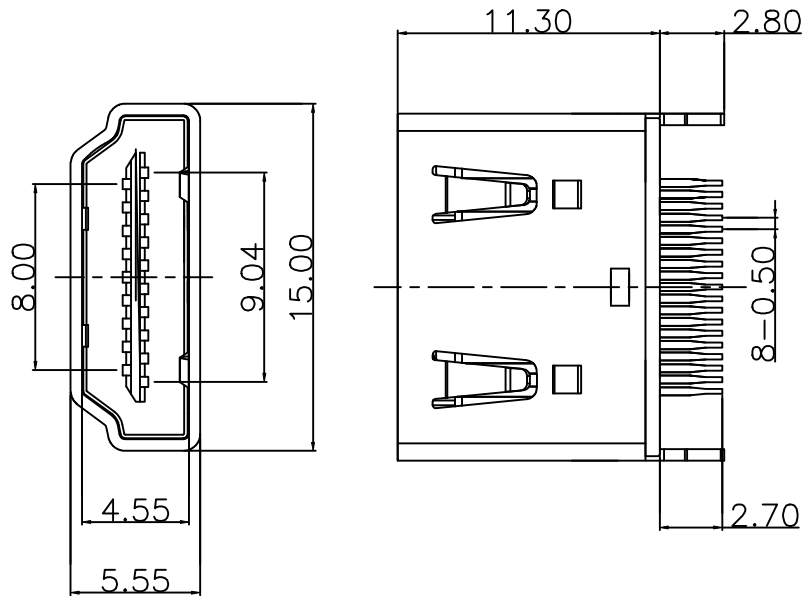
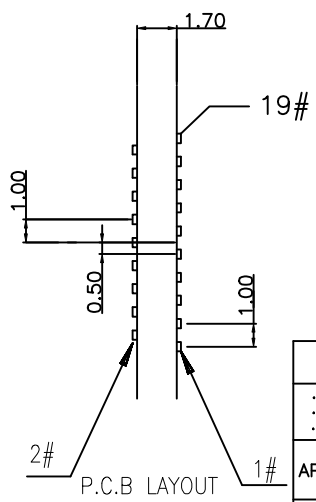


REV.	ECN.NO.	APPD.
A	/	/





NOTE:  
 1. MATERIA  
 1.1 Insulator:LCP BLACK  
 1.2 Shell And Contact: COPPER ALLOY  
 1.3 Contact Plating:GOLD PLATING ON CONTACT AREA. TIN PLATING ON SOLDER TALS. NCKEL UNDERPLATING OVERALL  
 1.4 Shell:Nickel plated over all  
 2. PECFCATION:  
 2.1 Current Rote:0.5Amp Min  
 2.2 insulator Resistance:100MΩ Min  
 2.3 Dielectric Strength: 300V AC Per minute  
 2.4 Contoct Resistance: 30mΩ Max  
 2.5 Operation Temperature:-55℃~+85℃

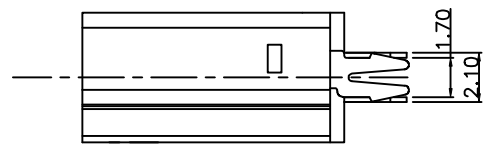

HD26-023X-XXX0X8

1:铁壳镀镍	1:吸塑盒
5:铜壳镀镍	8:载带
4:铁壳镀金	9:载带+贴麦拉
8:铜壳镀金	1:黑色
1:半金1u"	3:米黄色
3:半金3u"	
5:半金5u"	1:PA66
8:半金15u"	2:PBT
9:全金1u"	6:LCP
A:半金30u"	

TOLERANCE UNLESS OTHERWISE SPECIFIED								
.XXX	±0.10						.X'	±3'
.XX	±0.20							
.X	±0.30							
.XX'		±2'						
APPROVED		PART NAME:	HDMI 19P/F 180度 直插 镍 H款					
CHECKED		PART No:	HD26-0235-161018			C		
DRAWN		PROJECTION:	UNIT:	SCALE	SHEET	REV.		
DATE			mm	1:1	10F1	A		