


### SPECIFICATIONS

- Voltage rating: 30V AC/DC
- Current rating: 0.5A AC/DC
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.

### KY-0801HS-XX 0.80mm Pitch Housing

### HOUSING

- Part No.: KY-0801HS-XX
- Poles: 2, 4, 5, 8, 14, 15, 16, 17, 20
- Material: Base: Nylon 46 UL 94V-0
- Contact: Phosphor Bronze
- Finish: Gold Plated/Tin Plated
- Q'ty: 1,000 Pcs/Pizza Box

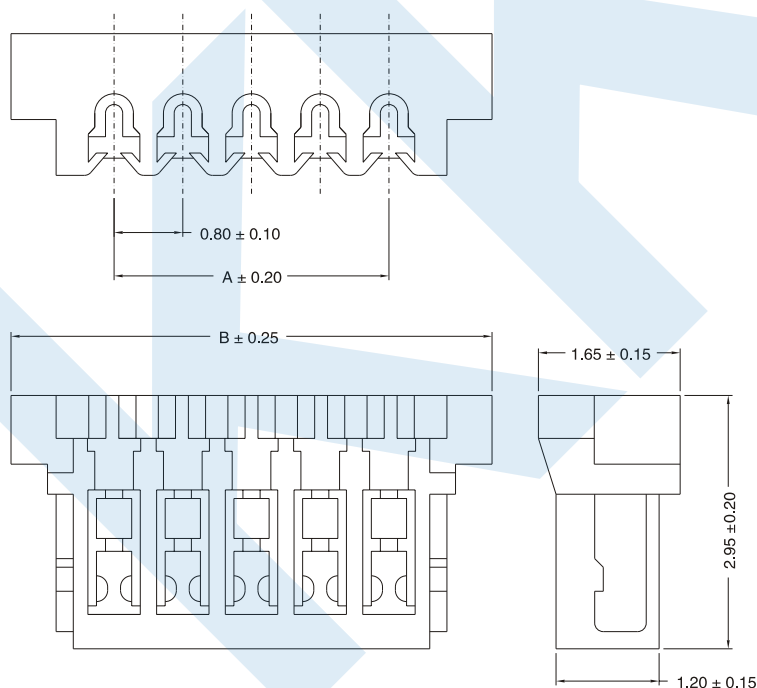


### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-0801HS-02	0.80	3.20
4	KY-0801HS-04	2.40	4.80
5	KY-0801HS-05	3.20	5.60
8	KY-0801HS-08	5.60	8.00
14	KY-0801HS-14	10.40	12.80
15	KY-0801HS-15	11.20	13.60
16	KY-0801HS-16	12.00	14.40
17	KY-0801HS-17	12.80	15.20
20	KY-0801HS-20	15.20	17.60

### KY-0801WR-XX 0.80mm Pitch 90° Wafer SMT Type

#### WAFER

- Part No.:KY-0801WR-XX
- Poles:2,4,5,8,14,15,16,17,20
- Material:Base:Nylon6T UL 94V-0
- Contact:Phosphor.Bronze/Brass
- Finish:Gold Plated/Tin Plated
- Q'ty:1,000Pcs/Pizza Box

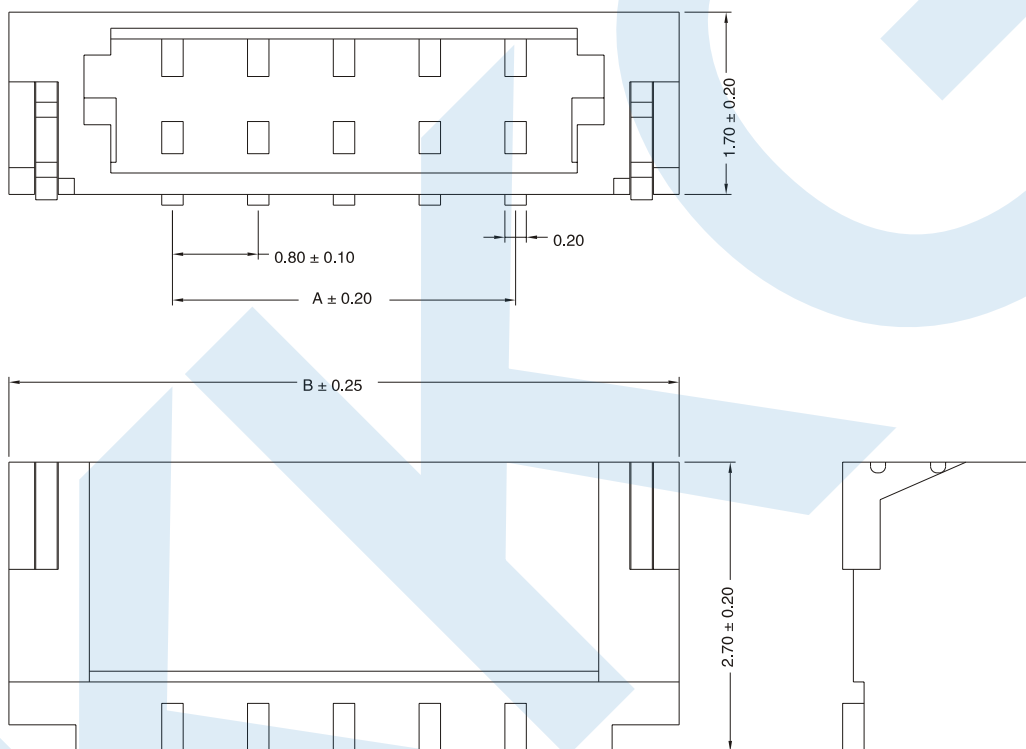

#### Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
2	KY-0801WR-02	0.80	3.85
4	KY-0801WR-04	2.40	5.45
5	KY-0801WR-05	3.20	6.25
8	KY-0801WR-08	5.60	8.65
14	KY-0801WR-14	10.40	13.45
15	KY-0801WR-15	11.20	14.25
16	KY-0801WR-16	12.00	15.05
17	KY-0801WR-17	12.80	15.85
20	KY-0801WR-20	15.20	18.25