

PITCH 0.8mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.4A

额定电压: 50V

耐电压: 200V




接触电阻: $\leq 20\text{m}\Omega$ 绝缘电阻: $500\text{M}\Omega$ 工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

塑件 (材质): LCP, UL94V-0

锁扣 (材质): LCP, UL94V-0


插簧 (材质): 磷青铜, 镀锡/镀金

焊片 (材质): 磷青铜, 镀锡/镀金

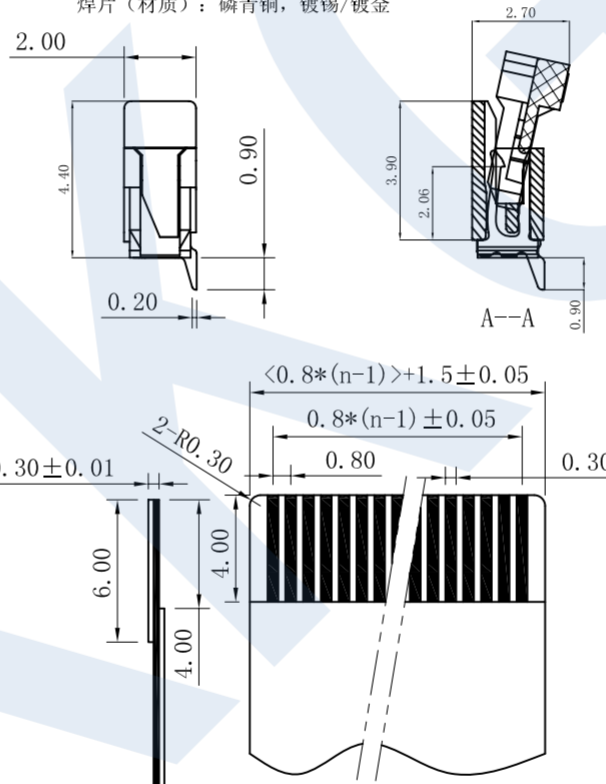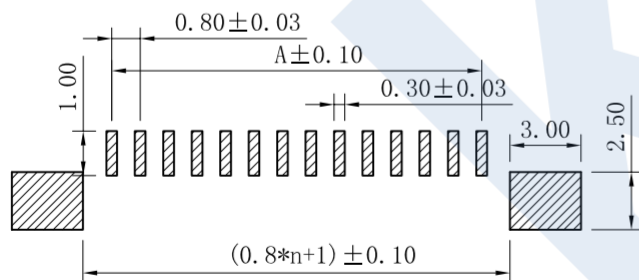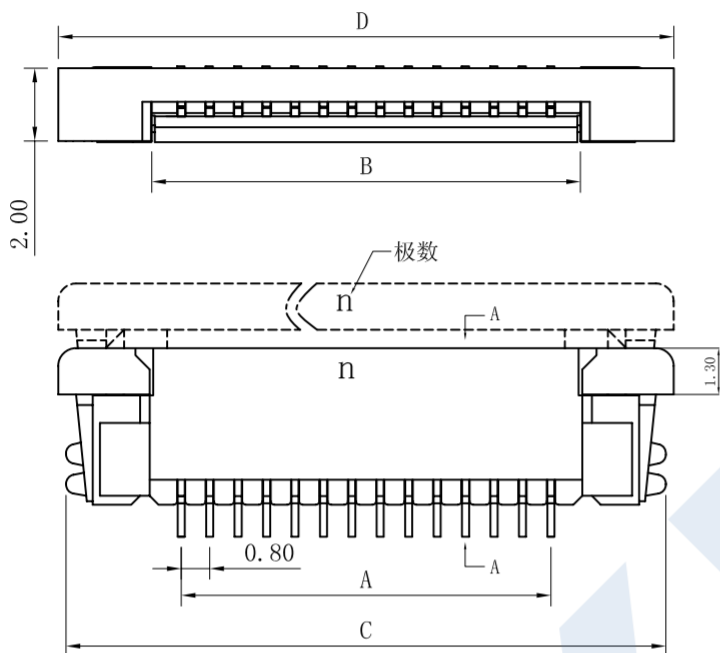

适用扁平电缆

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

X. ± 0.3	X° ± 5°	UNITS mm	NAME (INTENDED USE)	
.X ± 0.25	.X° ± 2°	MAT'L	0.8mm FPC (B型) 半包上接 (H=2.0)	
.XX ± 0.20	.XX° ± 1°	FINISH	PART NO. (INTENDED USE)	TITLE: 0.8mm FPC (B型) 半包上接 (H=2.0)
.XXX ± 0.10	.XXX° ± 0.5°		0.8K-BS-nPWB (H=2.0)	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q'TY	APPD:	DWG NO.: 0.8K-BS-nPWB
			CHKD:	
			DR: YLZ 2011.09.28	
				SCALE 1/1
				SHEET 1/1
				REV. A