


SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -40 °C – +85 °C
- Contact resistance: 40mΩ Max.

KY-1004HL-30 1.00mm Pitch Housing

HOUSING

- Part No.: KY-1004HL-30
- Material: Insulator: Nylon46 UL 94V-0
- Shell: 0.15mm Copper Alloy, Tin Plated
- Q'ty: 1,000 Pcs/Bag

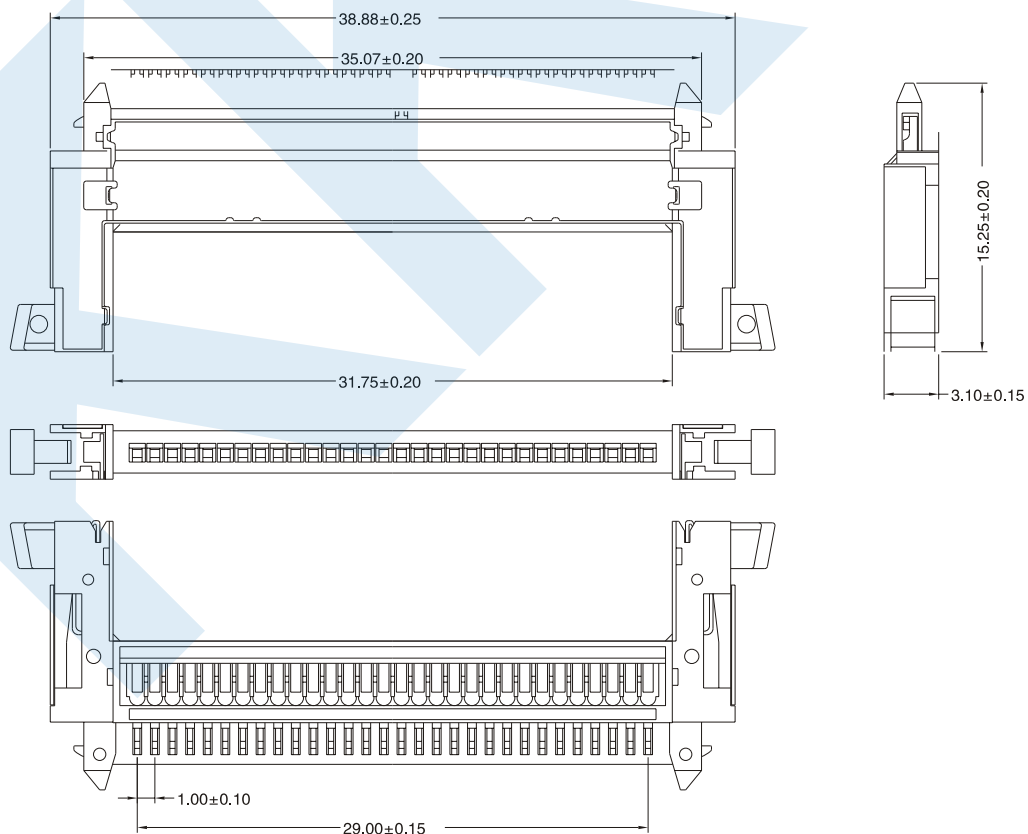

KY-1004WL-30 1.00mm Pitch 90° Wafer SMT Type

WAFER

- Part No.:KY-1004WL-30
- Material:Insulator:Nylon46 UL 94V-0
- Shell:0.15mm Copper Alloy,Tin Plated
- Q'ty:1,000 Pcs/Reel

