

HSF



ROHS

Notes:

1. Materials:

Housing: G. F. High Temp Thermoplastic Black

Contact: (0.20) 0.008 Ref. Phosphor Bronze

Pin: BRASS Alloy 360, $\frac{1}{2}$ Hard

2. Plating:

Contact: Nickel 50 Microinch Min. Undercoat Overall.

Gold Flash 4 Microinch Min. Over Palladium


Nickel 40 Microinch Min. In Contact Area

Pin: 100-200 Microinch Bright Tin Over 50 Microinch Nickel

3. Parts To Be Packaged In Pvc Tubes


4. Parts To Be RoHS Compatible

5. Nominal Dim. At Full Deflection, Reference

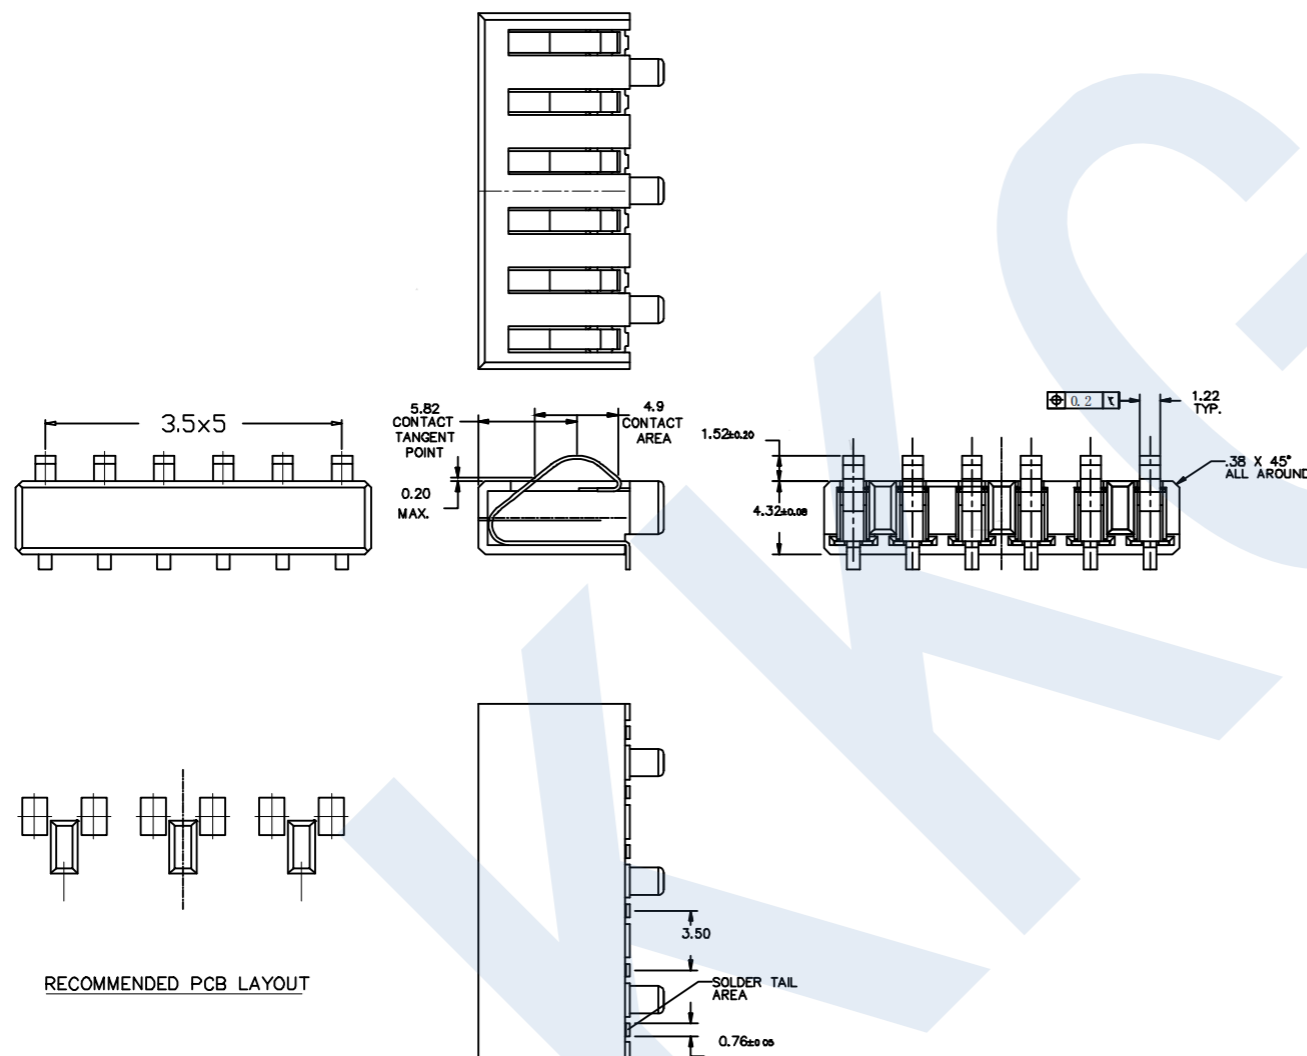

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 16/03/2020
CHECK BobYang DATE 16/03/2020



KKG

TITLE:
3.5mm Circuit Battery Connector 6P

DRAWING NO: BC-810

PRODUCT NO: BC-810

REV

DESCRIPTION

DATE