


SPECIFICATIONS

- Voltage rating: 200V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -40 °C – +85 °C
- Contact resistance: 40mΩ Max.





KY-1003HL-30 1.00mm Pitch Housing

HOUSING

- Part No.: KY-1003HL-30
- Material: Insulator: Nylon46 UL 94V-0
- Shell: 0.15mm Copper Alloy, Tin Plated
- Q'ty: 1,000 Pcs/Reel

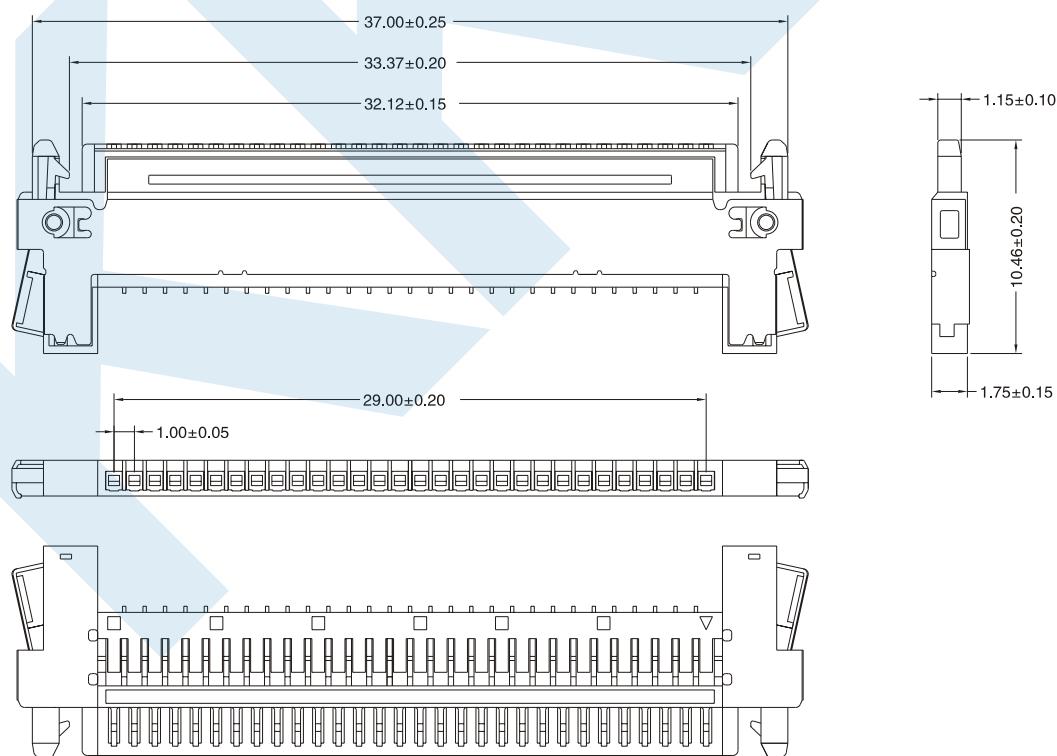


KY-1003HS-30 1.00mm Pitch Housing

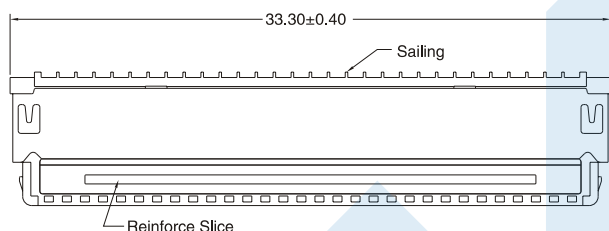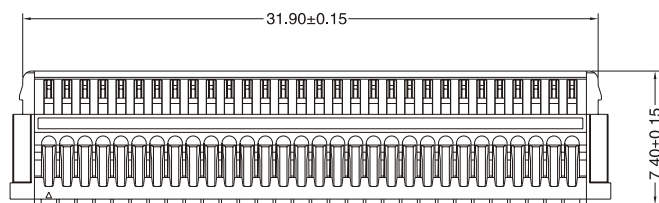

HOUSING

- Part No.: KY-1003HS-30
- Material: Nylon 46 UL 94V-0
- Lock: Stainless steel
- Reinforce slice: Stainless steel
- Q'ty: 1,000Pcs/Reel

KY-1003TPS-30 1.00mm Pitch Terminal

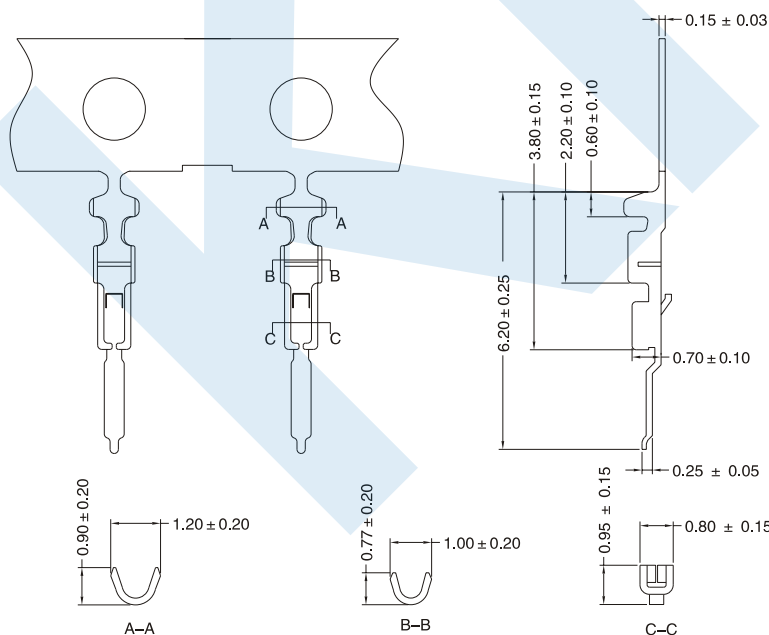

TERMINAL

- Part No.: KY-1003TPS-30
- Thickness: 0.15mm
- Material: Phosphor Bronze
- Finish: Gold Plated
- Q'ty: 20,000Pcs/Reel

KY-1003WL-30 1.00mm Pitch 90° Wafer SMT Type

WAFER

- Part No.:KY-1003WL-30
- Material:Nylon 46 UL 94V-0
- Bolt: Phosphor Bronze,Gold Plated
- Reinforce slice:Stainless steel
- Q'ty:1,500 Pcs/Reel

