

PITCH 1.0mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V




接触电阻: $\leq 20\text{m}\Omega$ 绝缘电阻: $800\text{M}\Omega$ 工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0


锁扣(材质): LCP, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金


焊片(材质): 磷青铜, 镀锡/镀金

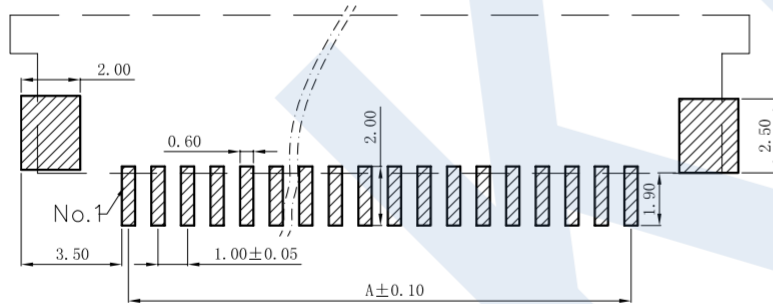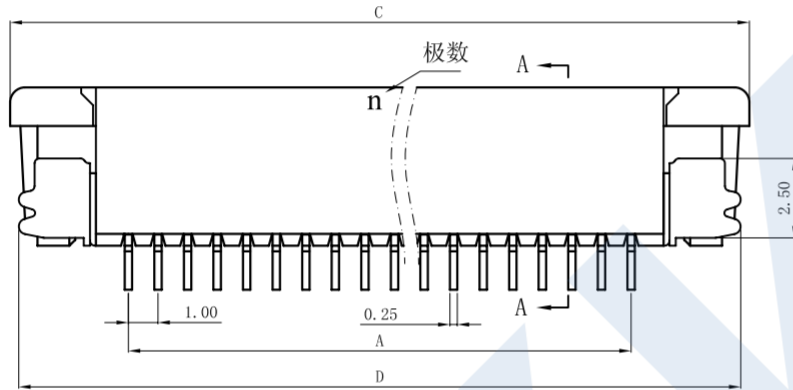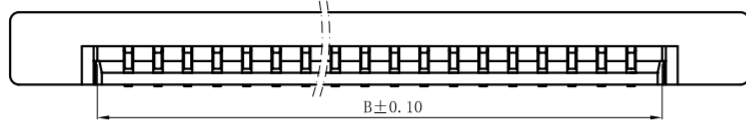

印制电路板 (PCB)

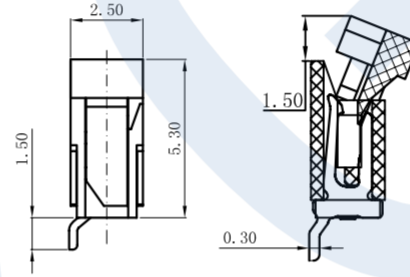

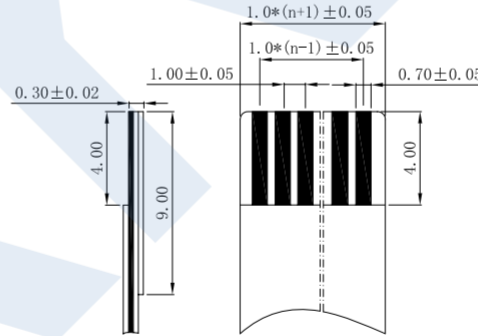

A--A



适用扁平电缆

孔位	A	B	C	D
4	3.00	5.15	11.10	10.20
5	4.00	6.15	12.10	11.20
6	5.00	7.15	13.10	12.20
7	6.00	8.15	14.10	13.20
8	7.00	9.15	15.10	14.20
9	8.00	10.15	16.10	15.20
10	9.00	11.15	17.10	16.20
11	10.00	12.15	18.10	17.20
12	11.00	13.15	19.10	18.20
13	12.00	14.15	20.10	19.20
14	13.00	15.15	21.10	20.20
15	14.00	16.15	22.10	21.20
16	15.00	17.15	23.10	22.20
17	16.00	18.15	24.10	23.20
18	17.00	19.15	25.10	24.20
19	18.00	20.15	26.10	25.20
20	19.00	21.15	27.10	26.20
21	20.00	22.15	28.10	27.20
22	21.00	23.15	29.10	28.20
23	22.00	24.15	30.10	29.20
24	23.00	25.15	31.10	30.20
25	24.00	26.15	32.10	31.20
26	25.00	27.15	33.10	32.20
27	26.00	28.15	34.10	33.20
28	27.00	29.15	35.10	34.20
29	28.00	30.15	36.10	35.20
30	29.00	31.15	37.10	36.20
31	30.00	32.15	38.10	37.20
32	31.00	33.15	39.10	38.20
33	32.00	34.15	40.10	39.20
34	33.00	35.15	41.10	40.20
35	34.00	36.15	42.10	41.20
36	35.00	37.15	43.10	42.20

X. ± 0.3	X° ± 5°	UNITS mm	NAME (INTENDED USE)				
.X ± 0.25	.X° ± 2°		MAT'L				
.XX ± 0.20	.XX° ± 1°	FINISH	PART NO. (INTENDED USE)	TITLE:			
.XXX ± 0.10	.XXX° ± 0.5°		1. OK-FX-nPWB	1. 0mm FPC (E型) 半包下接 (H=2.5)			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			APPD:	DWG NO. :			
			CHKD:	100K13-EXB0000000			
			Q' TY				
			DR: YLZ 2011.09.28		SCALE	SHEET	REV.
			1/1		1/1	A	