
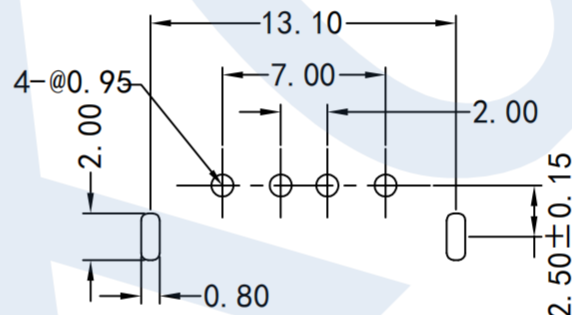


文件类型: 产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

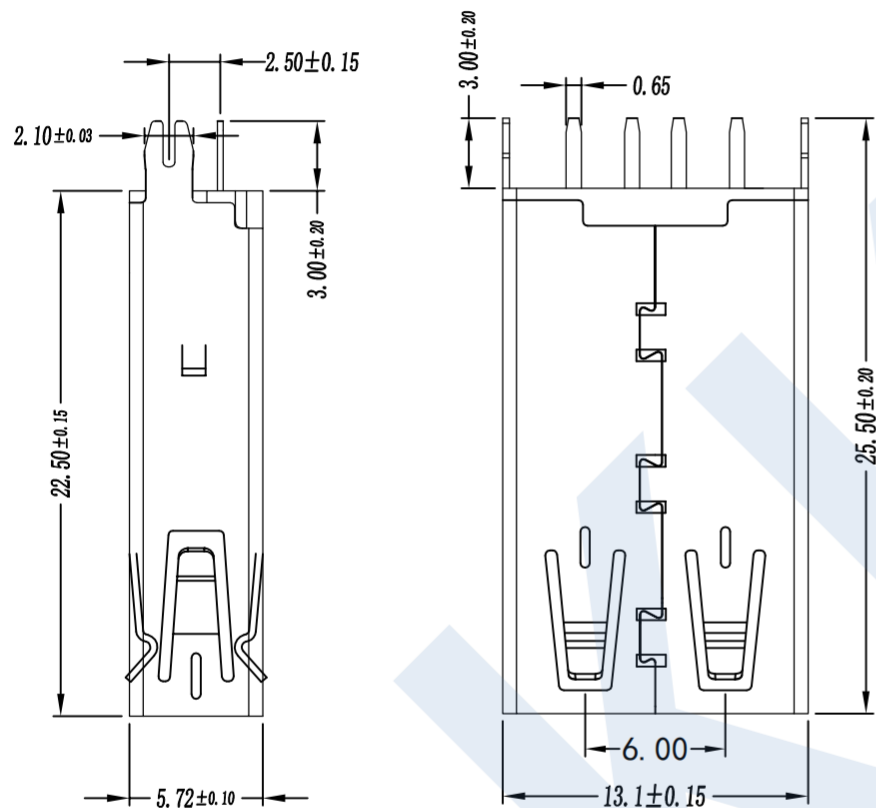

RECOMMENDED PCB LAYOUT
PCB图仅供参考

原材料Material:


1. 塑胶Housing: Hing Temperature thermoplastics, UL94v-0 PBT/LCP White/Black
2. 端子Contact: Copper Alloy C2680
3. 外壳Shell: Copper Alloy C2680/SPCC

规格说明Specification:

1. 额定电流Current rating: 1.0A/contact terminal
2. 额定电压Voltage Rating 30V DC
3. 接触阻抗Contact resistance: 30 milliohms MAX
4. 耐压Dielectric Withstanding Voltage 500 V AC For one minute
5. 绝缘阻抗Insulation resistance: 1000MEGA ohms MI
6. 插拔力Connector Mate and Unmate ForceMate force: 3.57kgf (MAX) Unmate force: 1.02kgf (MIN)
7. 端子保持力: Terminal Retenion 0.5kgf (MIN)
8. 端子电镀Contact Electroplate: Piated Gold in Mating Area; Tin On Solder Talls
9. 外壳电镀Shell Electroplate; Nickel Plating

备注Note:

端子电镀: 01;Au1u"; 03;Au3u"; 05;Au5u"
10;Au10u"; 15;Au15u"; 30;Au30u"
主体颜色: 白色, 黑色, 红色, 橙色, 蓝色, 绿色, 紫色等
(可根据客户需求定制各种颜色)

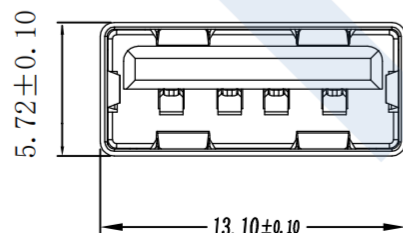

UNITS MM	SCALE 1:1				
 GENERAL TOLERANCE X. ±0.30 X.X ±0.20 X.XX ±0.10 X.° ±3° X.X° ±2°		DR.	Lila	TITLE: USB AF 180度DIP长体22.5直脚无卷边	
		CHK.	Loran	DWG NO: USB-UA001Z	
		APPD.	LIGUIYUAN	DATE: 2011.06.28	P
				PART NO:	SIZE A4