

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	HT	/	WZX

## NOTES:

## 1.MATERIAL:

HOUSING: LCP UL94V-0,BLACK

CONTACT: C5191,30u" Ni UNDERPLATED OVERALL

G/F PALTED ON CONTACT AREA&amp; SOLDER AREA

SHELL: SUS304,30u" Ni UNDERPLATED OVERALL

G/F PALTED ON SOLDER AREA




## 2.ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 50mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE


## 3.OPERATION TEMPERATURE:-40°C~+85°C

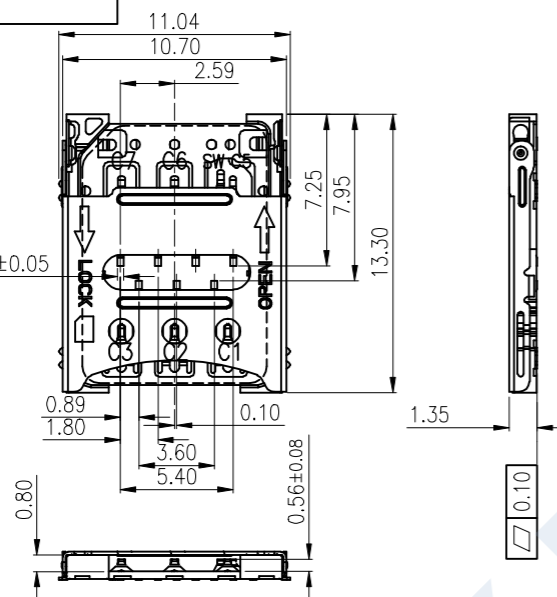


STEP 1 INSERT Nano-SIM CARD



STEP 2 PUSH THE SHELL






STEP 3 FINISH




NANO SIM CARD

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
SW	DETECTION SWITCH

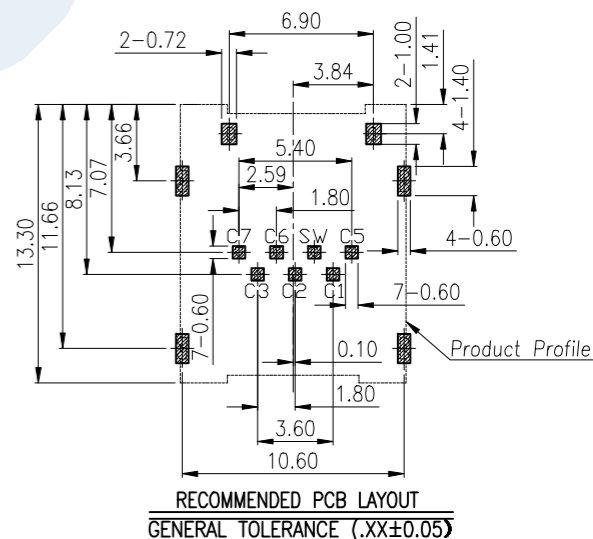

MILLIMETERS	INCH	UNITS				
X' ± 2'	X' ± 2'	MM				
.X ± 0.38	.XX ± 0.012	MAT'L	PART NUMBER:		TITLE:  1.35H NANO STD城盖内焊	
.XX ± 0.25	.XXX ± 0.008	SEE NOTES				
.XXX ± 0.15	.XXXX ± 0.004	FINISH	APPD:		DWG NO.:	
		SEE NOTES				
		QTY	CHKD:			
		SEE NOTES				
		DR:			SCALE	
					SHEET	
					REV.	
					1:1	
					1/2	
					A0	


RoHS

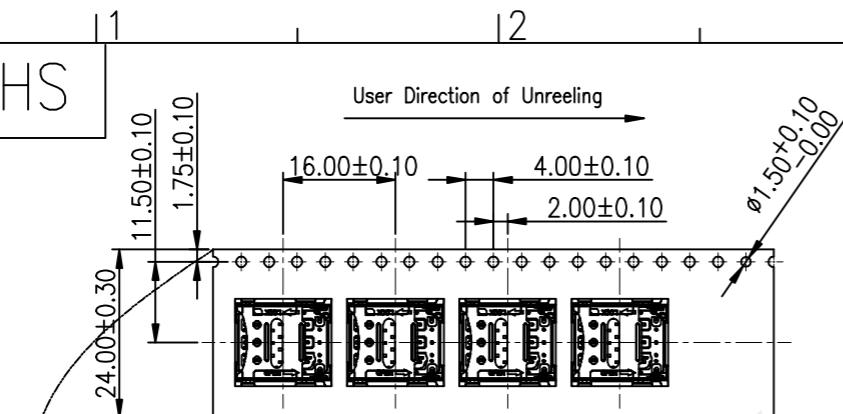



NOTES

1. NUMBER OF CONNECTORS: 1800PCS/REEL

2. LEAD TAPE LENGTH

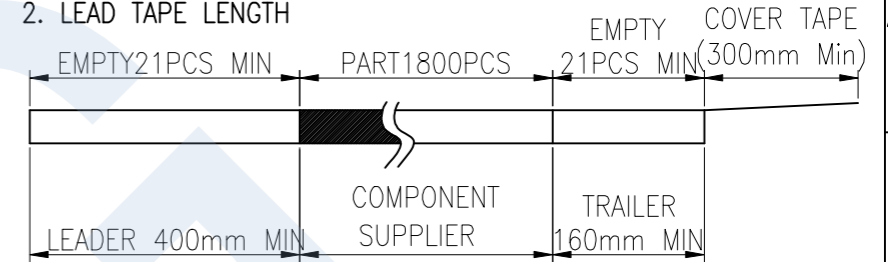

3. QUANTITY: 18000PCS/CARTON

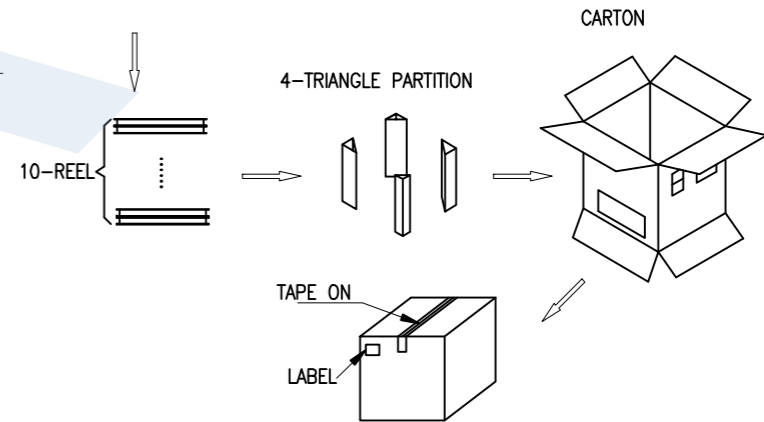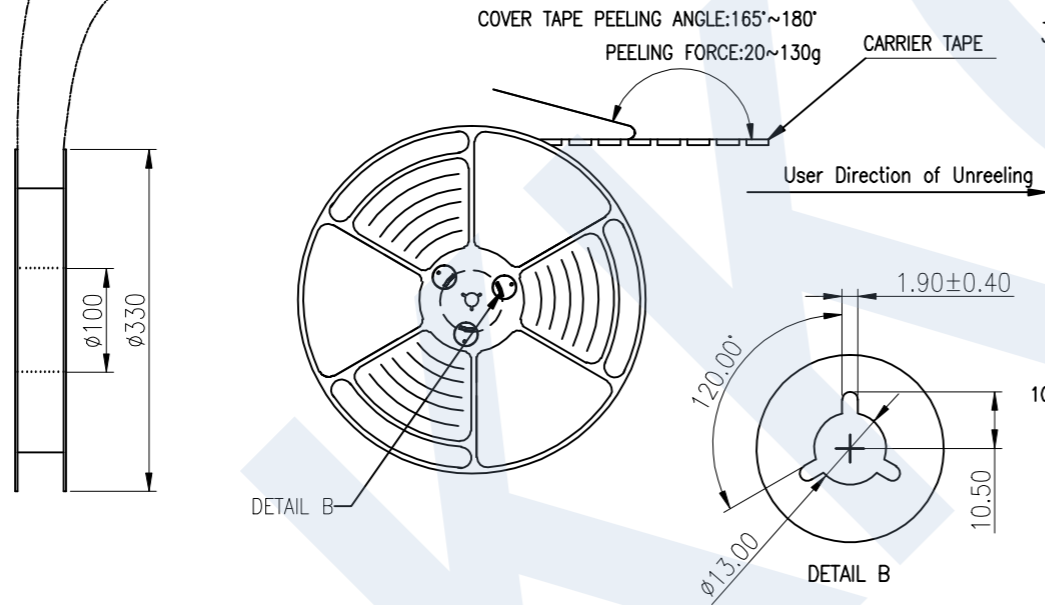

MILLIMETERS	INCH	UNITS				
		MM				
X' ± 2'	X' ± 2'	MAT'L	PART NUMBER:		TITLE: 1. 35H NANO SIM 封装内焊	
.X ± 0.30	.XX ± 0.012	SEE NOTES				
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO ·	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES				
		QTY	CHKD:			
		SEE NOTES				
			DR:		SCALE	
					SHEET	
					REV.	
					1:1	
					2/2	
					A0	