


SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 1800V AC/minute
- Insulation resistance: 1000MΩ Min.
- Temperature range: -25 °C – +85 °C
- Contact resistance: 20mΩ Max.

KY-2012HD-XX 2.00mm Pitch Dual Row Housing

HOUSING

- Part No.: KY-2012HD-XX
- Poles: 2*5–2*18, 2*20
- Material: Nylon66 UL 94V-0
- Q'ty: 1,000 Pcs/Bag

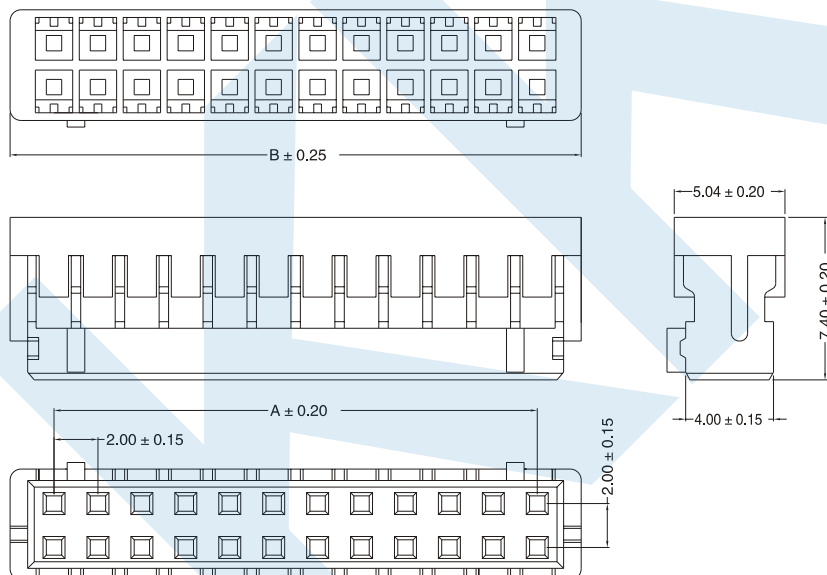

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)	
		A	B
10	KY-2012HD-10	8.00	12.00
12	KY-2012HD-12	10.00	14.00
14	KY-2012HD-14	12.00	16.00
16	KY-2012HD-16	14.00	18.00
18	KY-2012HD-18	16.00	20.00
20	KY-2012HD-20	18.00	22.00
22	KY-2012HD-22	20.00	24.00
24	KY-2012HD-24	22.00	26.00
26	KY-2012HD-26	24.00	28.00
28	KY-2012HD-28	26.00	30.00
30	KY-2012HD-30	28.00	32.00
32	KY-2012HD-32	30.00	34.00
34	KY-2012HD-34	32.00	36.00
36	KY-2012HD-36	34.00	38.00
40	KY-2012HD-40	38.00	42.00

KY-2012TPS-10 2.00mm Pitch Terminal

TERMINAL

- Part No.:KY-2012TPS-10
- Thickness:0.20mm
- Material:Phosphor Bronze
- Finish:Tin Plated
- Q'ty:10,000 Pcs/Reel

