


SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 0.5A AC/DC(AWG#30)
- Withstanding Voltage:500V AC/minute
- Insulation resistance:100MΩ Min.
- Temperature range:-40 °C – +80 °C
- Contact resistance:40mΩ Max.

KY-1006HL-XX 1.00mm Pitch Housing

HOUSING


- Part No.:KY-1006HL-XX
- Poles:31,41,51
- Material:Insulator:PA46 UL 94V-0
- Shell:Stainless steel
- Q'ty: 50 Pcs/Box

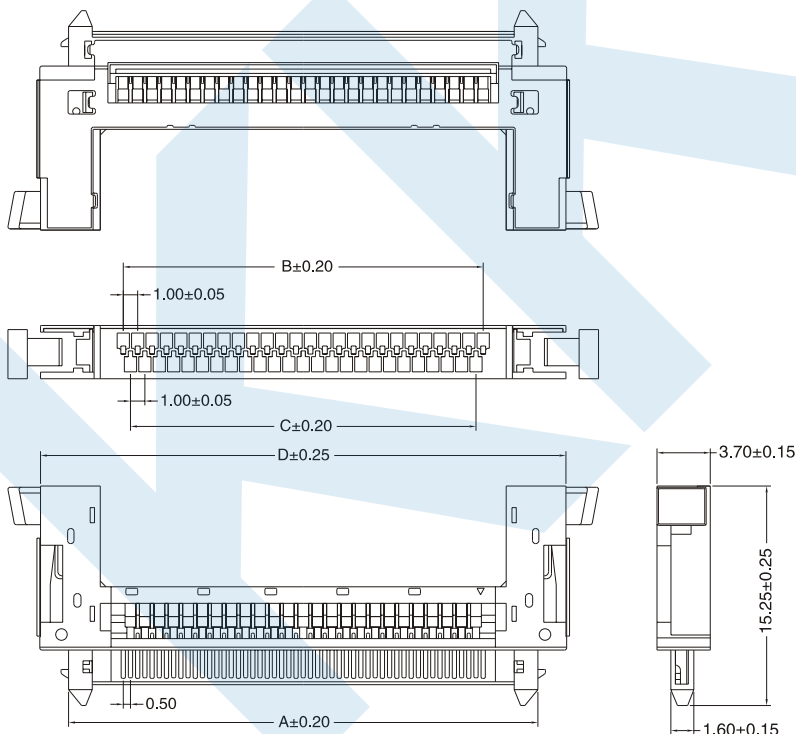

Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)			
		A	B	C	D
31	KY-1006HL-31	22.60	14.00	15.00	26.50
41	KY-1006HL-41	27.60	19.00	20.00	31.50
51	KY-1006HL-51	32.60	24.00	25.00	36.50


KY-1006ATPS-30 1.00mm Pitch Terminal

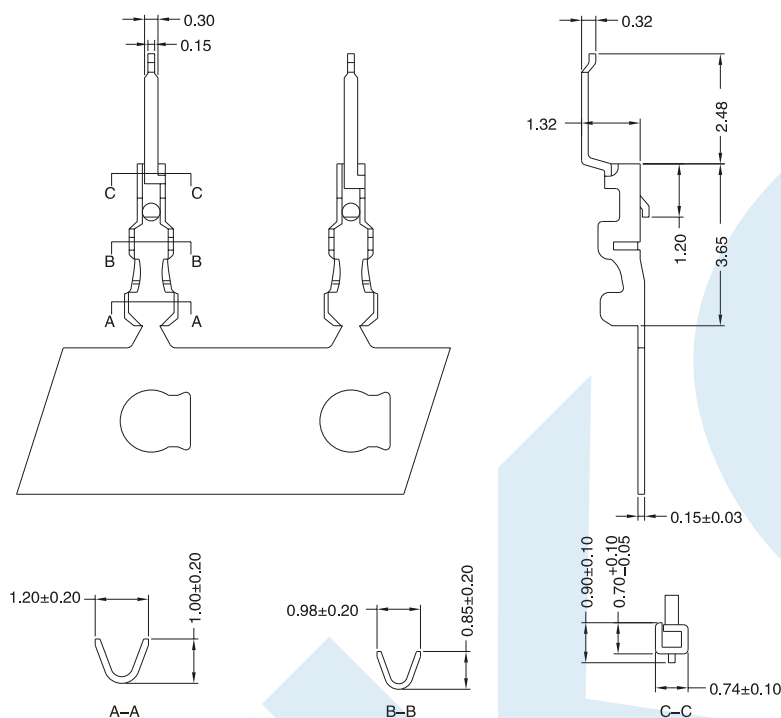

TERMINAL

- Part No.:KY-1006ATPS-30
- Thickness:0.15mm
- Material:Phosphor Bronze
- Finish:Gold Plated
- Q'ty:20,000Pcs/Reel


KY-1006BTPS-30 1.00mm Pitch Terminal

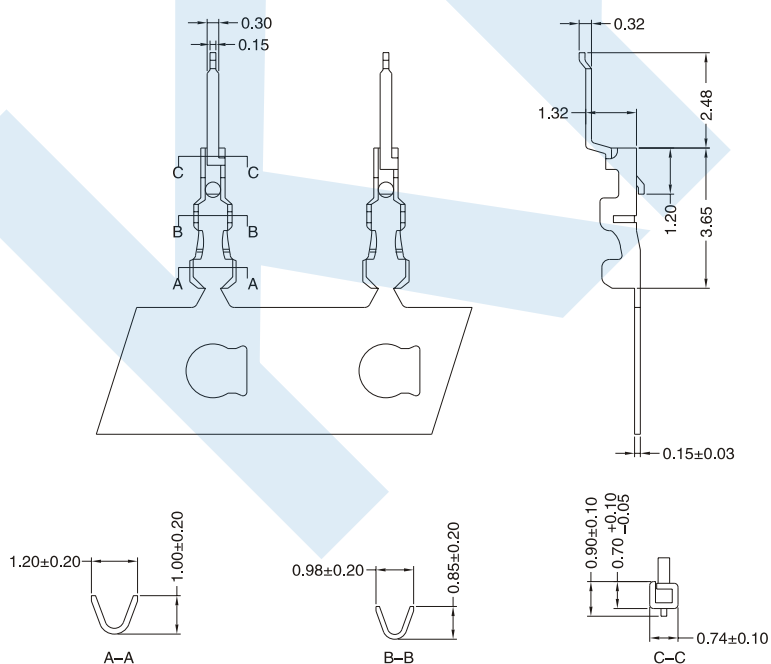

TERMINAL


- Part No.:KY-1006BTPS-30
- Thickness:0.15mm
- Material:Phosphor Bronze
- Finish:Gold Plated
- Q'ty:20,000Pcs/Reel

KY-1006HC-51 1.00mm Pitch Housing

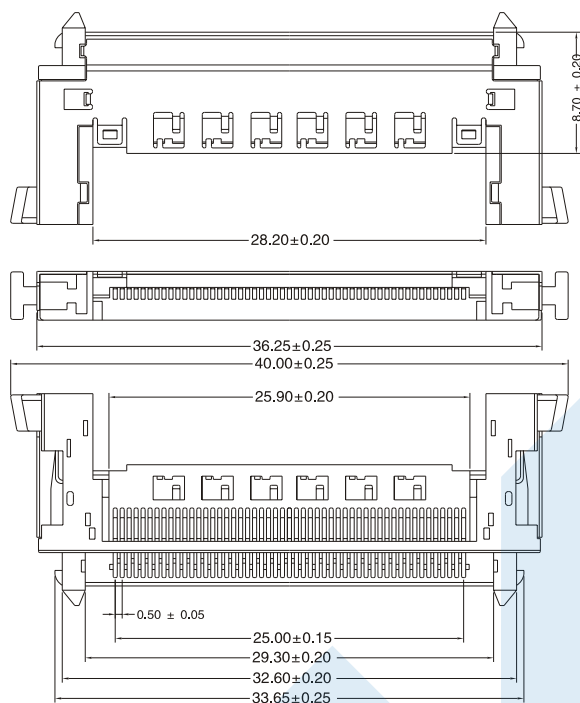


HOUSING

- Part No.:KY-1006HC-51
- Material:Insulator:LCP UL 94V-0
- Shell:Stainless steel
- Q'TY: 50 Pcs/Box




KY-1006WL-XX 1.00mm Pitch 90° Dual Row Wafer SMT Type

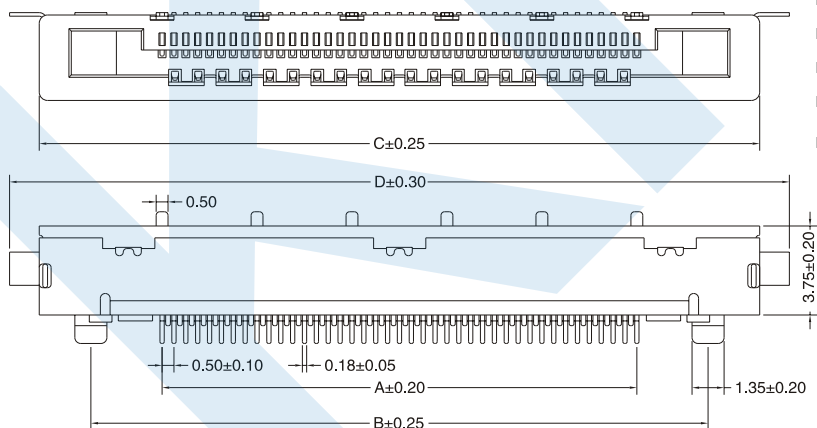

WAFER

- Part No.:KY-1006WL-XX
- Poles:31,41,51
- Material:Insulator:PA46 UL 94V-0
- Shell:Stainless steel
- Q'ty: 1,500Pcs/Reel



Ordering Information & Dimensions

POLES	PART NO.	DIMENSION(mm)						
		A	B	C	D	E	F	G
31	KY-1006WL-31	15.00	21.00	25.35	27.85	24.75	4.00	-
41	KY-1006WL-41	20.00	26.00	30.35	32.85	29.75	4.00	4.00
51	KY-1006WL-51	25.00	31.00	35.35	37.85	34.75	5.00	5.00