

2.54mm Pitch wire to board connectors



SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 4A AC/DC
- Withstanding Voltage:1000V AC/minute
- Insulation resistance:1000MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance:20mΩ Max.

HOUSING


- Part No.: KY-2514HS-XX
- Poles: 2-12P
- Material: Nylon 66 94V-0
- Q’ TY: 1000 Pcs/Bag

POLES	PART NO.	DIMENSION (mm)	
		A	B
2	KY-2514HS-02	2. 50	7. 50
3	KY-2514HS-03	5. 00	10. 00
4	KY-2514HS-04	7. 50	12. 50
5	KY-2514HS-05	10. 00	15. 00
6	KY-2514HS-06	12. 50	17. 50
7	KY-2514HS-07	15. 00	20. 00
8	KY-2514HS-08	17. 50	22. 50
9	KY-2514HS-09	20. 00	25. 00
10	KY-2514HS-10	22. 50	27. 50
11	KY-2514HS-11	25. 00	30. 00
12	KY-2514HS-12	27. 50	32. 50

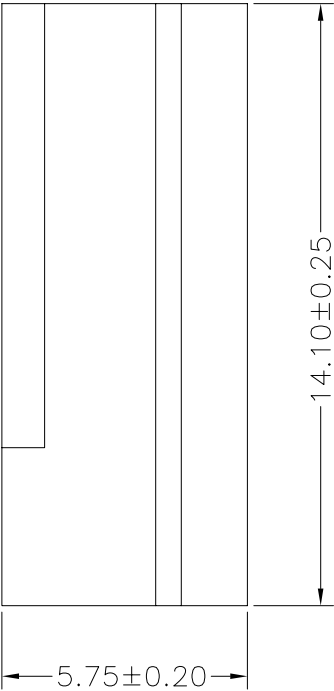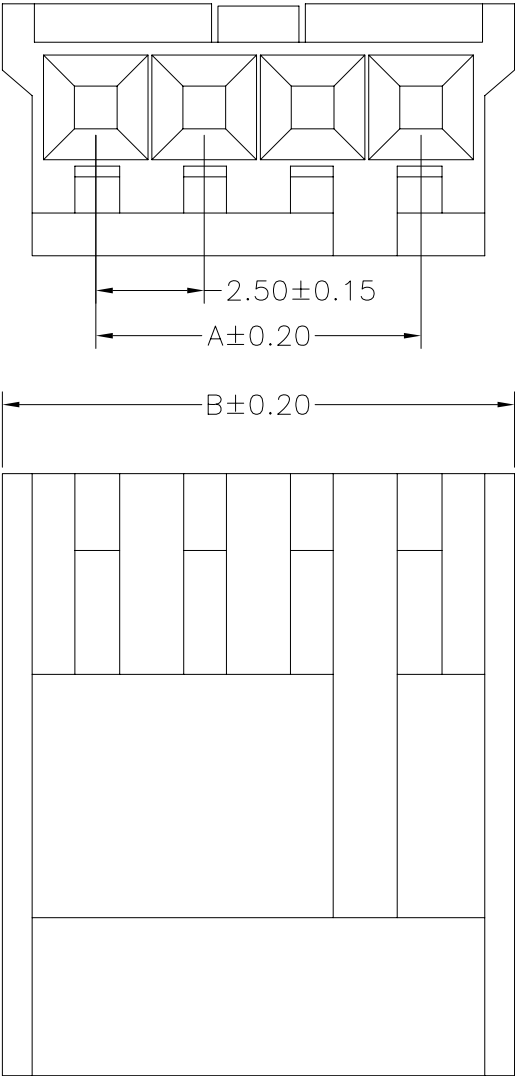

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
C	增加A±0.20尺寸	2014.4.18	高雷
D	取消产品“SP”标识	2014.5.28	高雷
E	增加Pin位	2015.11.4	杨玉



绘图 (DRAWN)	杨 玉	投影 (PROJECT)		公差 (TOLERNCE)	料 号 (PART NO)	KY-2514HS-XX	页 次 (PAGE)
		单位 (UNIT)	mm	0. 0 ± 2°	图 号 (DRAW NO)	LJ1KY-2514HS-XX	1 / 1
审核 (CHECKED)		比例 (SCALE)	FIT	0. 0 ± 0. 30			
		版本 (EDITION)	E	0. 00 ± 0. 20	品 名 (NAME)	2. 54mm PITCH HOUSING	
核准 (APPROVE)		日期 (DATE)	2015. 11. 4	0. 000 ± 0. 10			