

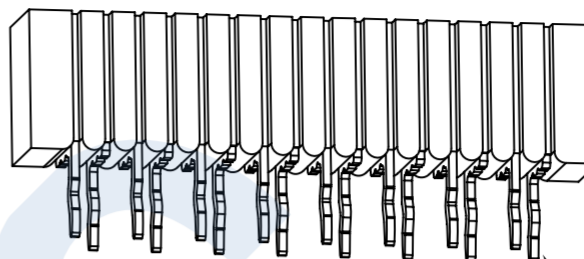


PCB LAYOUT

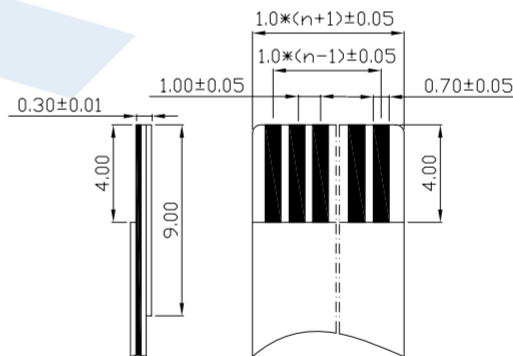

正脚基准




适用扁平电缆

性能:

额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 800MΩ
工作温度: -20℃ ~ +85℃

塑件(材质): LCP BLACK, UL94V-0
插簧(材质): 磷青铜, 镀锡/镀金

孔位	A	B	C
4	6.00	3.00	5.10
5	7.00	4.00	6.10
6	8.00	5.00	7.10
7	9.00	6.00	8.10
8	10.00	7.00	9.10
9	11.00	8.00	10.10
10	12.00	9.00	11.10
11	13.00	10.00	12.10
12	14.00	11.00	13.10
13	15.00	12.00	14.10
14	16.00	13.00	15.10
15	17.00	14.00	16.10
16	18.00	15.00	17.10
17	19.00	16.00	18.10
18	20.00	17.00	19.10
19	21.00	18.00	20.10
20	22.00	19.00	21.10
21	23.00	20.00	22.10
22	24.00	21.00	23.10
23	25.00	22.00	24.10
24	26.00	23.00	25.10
25	27.00	24.00	26.10
26	28.00	25.00	27.10
27	29.00	26.00	28.10
28	30.00	27.00	29.10
29	31.00	28.00	30.10
30	32.00	29.00	31.10
31	33.00	30.00	32.10
32	34.00	31.00	33.10
33	35.00	32.00	34.10
34	36.00	33.00	35.10
35	37.00	34.00	36.10

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)				
.X ± 0.25	.X° ± 2°	MAT' L	PART NO. (INTENDED USE)				
.XX ± 0.20	.XX° ± 1°	FINISH	1. 0-B-nP	TITLE: 1. 0mm FPC(双面接) 直针			
.XXX ± 0.10	.XXX° ± 0.5°		APPD:	DWG NO.:			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q' TY	CHKD:		SCALE	SHEET	REV.
			DR:huang sheng 2013/03/29		1/1	1/1	A