

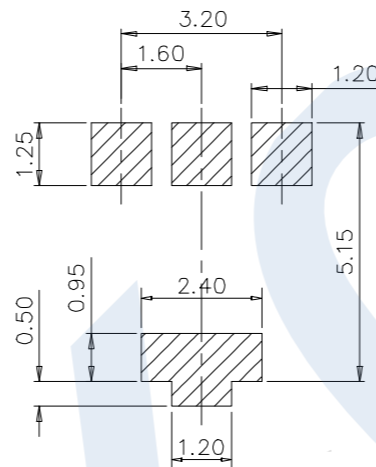
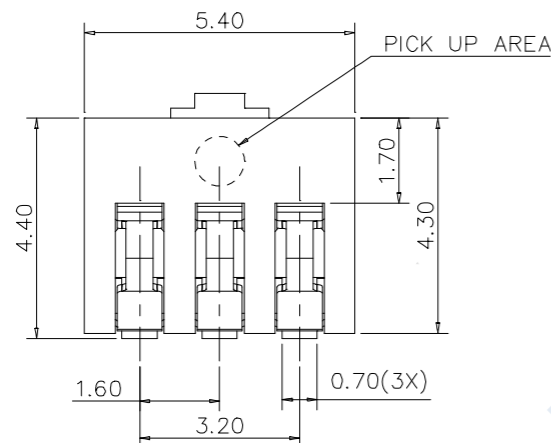



HSF

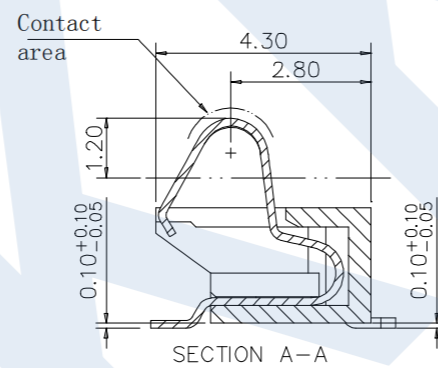


RECOMMENDED P.C.B LAYOUT
TOLERANCE : ± 0.05

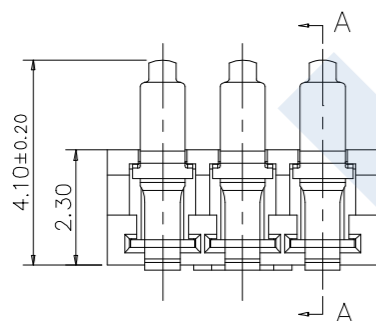

ELECTRICAL PERFORMANCES:
RATING CURRENT: 2.0 A
RATING VOLTAGE : 250 V AC
CONTACT RESISTANCE: 30mΩ
INSULATION RESISTANCE: 1000mΩ
DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC for 1 minute
MECHANICAL PERFORMANCE:
DURABILITY: 5000 times
NORMAL FORCE AT MATING POSITION: 80g min
OPERATION TEMPERATURE: -55°C ~ +125°C
Ordering Code:

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Wu Sai DATE 22/03/2018
CHECK BobYang DATE 22/03/2018



TITLE:
3 Circuit Battery Connector 1.6 Centers

DRAWING NO: BC-265

PRODUCT NO: BC-265

REV

DESCRIPTION

DATE