


15

F

RoHS

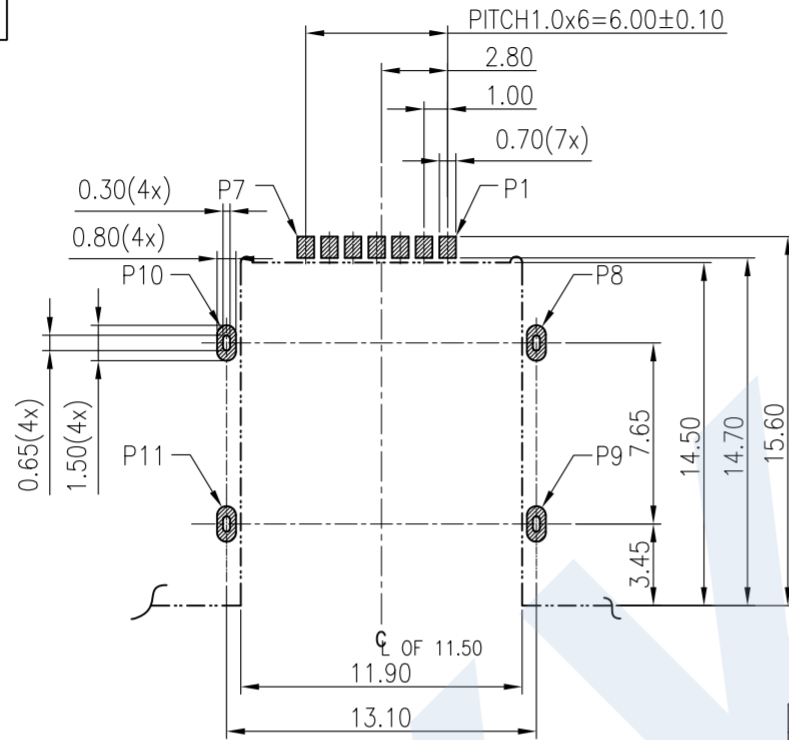

RECOMMENDED P.C. BOARD LAYOUT(MOUNT SURFACE)

TOLERANCES UNLESS OTHERWISE SPEC.±0.05


NOTES:

▨ : PAD AREA


□ : KEEP OUT AREA

CONTACT PIN ASSIGNMENT		
PIN No.	No. FOR CARD	FUNCTION
P1	CD	CARD DETECT
P2	C5	GND
P3	C1	Vcc
P4	C6	Vpp
P5	C2	RST
P6	C7	I/O
P7	C3	CLK
P8	None	GND
P9	None	GND
P10	None	GND
P11	None	GND

CONNECTOR WITH TRAY

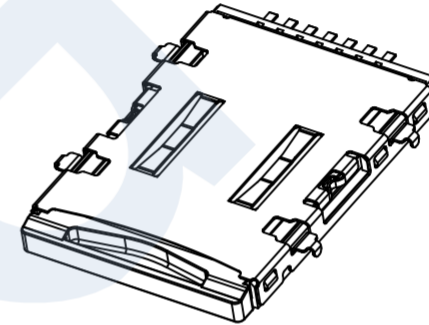


CONNECTOR

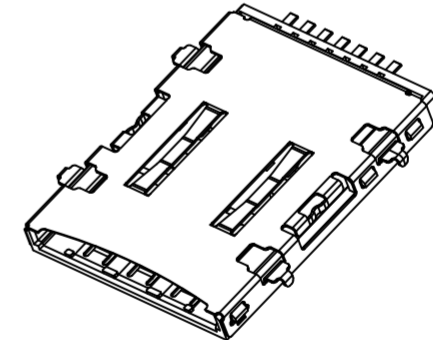



4	TRAY	1PCS	HIGH TEMPERATURE THERMOPLASTIC	UL94V-0;COLOR BLACK.
3	SHELL	1PCS	STAINLESS STEEL	NI PLATING
2	CONTACT	1PCS	COPPER ALLOY	NICKEL BASE, TERMINAL CONTACT POINT GOLD PLATED, SOLDER FEET FOG TIN
1	MOLDING	1PCS	HIGH TEMPERATURE THERMOPLASTIC	UL94V-0;COLOR BLACK.
NO	Description	Dosage	Material	Color/plating

MILLIMETERS	INCH	UNITS	MM		
X° ± 2°	X° ± 2°	MAT'L			
.X ± 0.30	.XX ± 0.012	SEE NOTES	PART NUMBER:		
.XX ± 0.20	.XXX ± 0.008	FINISH			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	APPD:		
QTY			CHKD:		
			DR:		
SEE NOTES			TITLE:		
			NANO SIM H1.5沉板(带卡托)		
DWG NO.			SCALE		
SHEET			REV.		
A0			1:1		


- 一、
- 1) 將成品一一放入包裝盤內, 依同一方向放入.
  - 2) 包裝時, 如圖所示.
  - 3) 一個包裝盤放置1500个成品.

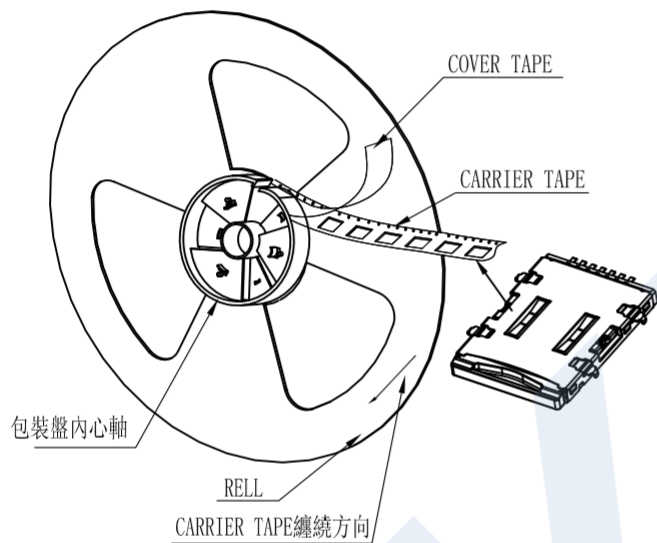


- 二、
- 1) 一只紙箱可放置10个包裝盤.
  - 2) 將10个包裝盤放在防水袋中.
  - 3) 箱底放保麗龍板, 再依次將指定数量的卷裝產品放入箱內, 四角分別放入四个三角护板, 最上层再放上保麗龍板.
  - 4) 一只紙箱可放15000PCS的成品.

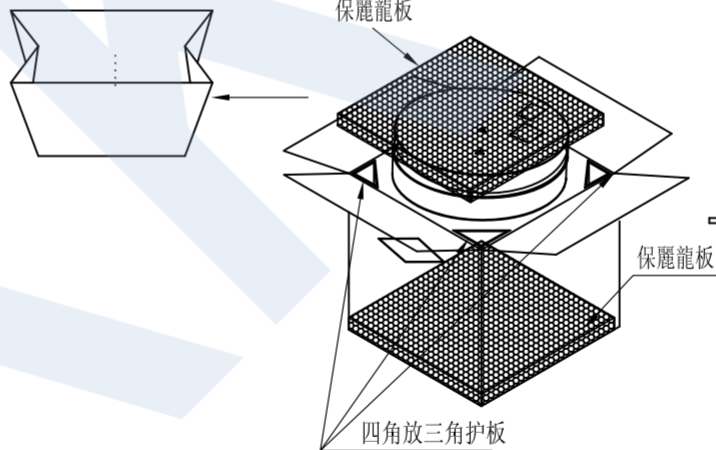



- 三、
- 1) RELL載帶尺寸圖.

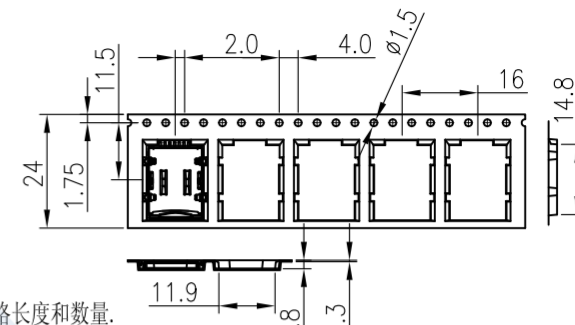

- 四、
- 1) RELL載帶前后空格长度和数量.

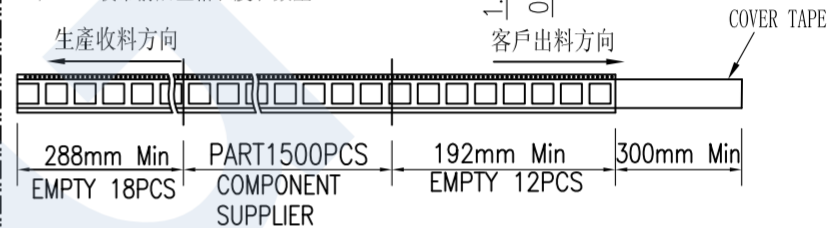

MILLIMETERS	INCH	UNITS MM						
X° ± 2°	X° ± 2°	MAT'L						
.X ± 0.30	.XX ± 0.012	SEE NOTES	PART NUMBER:		TITLE: NANO SIM H1.5沉板(帶卡托)			
.XX ± 0.20	.XXX ± 0.008	FINISH						
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	APPD:		DWG NO.:			
			CHKD:					
			DR:					
					SCALE	SHEET	REV.	
					1:1	3/3	A0	