

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/11'17	HFL	HFL	LHY
A1	ECN1806012	按实际修改产品品名	20/06.18	SUPER	HFL	TEDDY

NOTES:

1. MATERIAL:

1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.

1.2 Terminal:Copper Alloy.

1.3 Shell:Stainless Steel.

2.PLATING:

2.1 Contact: Contact Area: Au G/F, Solder area:Matte tin
80u"Min ;Under plate Ni 30u"Min all over

2.2 CD PIN: Contact Area: Au G/F,Under plate Ni 30u"Min all over

3. SPECIALITY:

3.1 Rated current:1.0A

3.2 Rated voltage:30V

3.3 Contact Resistance:50mΩ MAX



3.4 Insulation Resistance:1000MΩ MIN 500V DC

3.5 Dielectric withstanding voltage: 500V AC.

3.6 Solder ability:255±5℃, 5±0.5s.



3.7 Durability:10000 Cycles Min.

3.8 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX

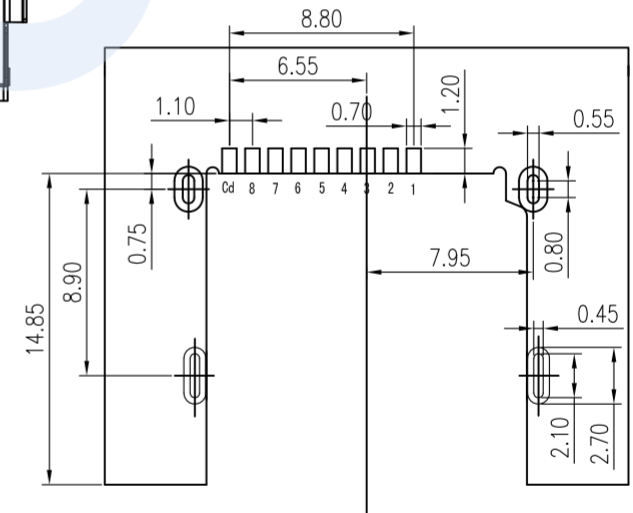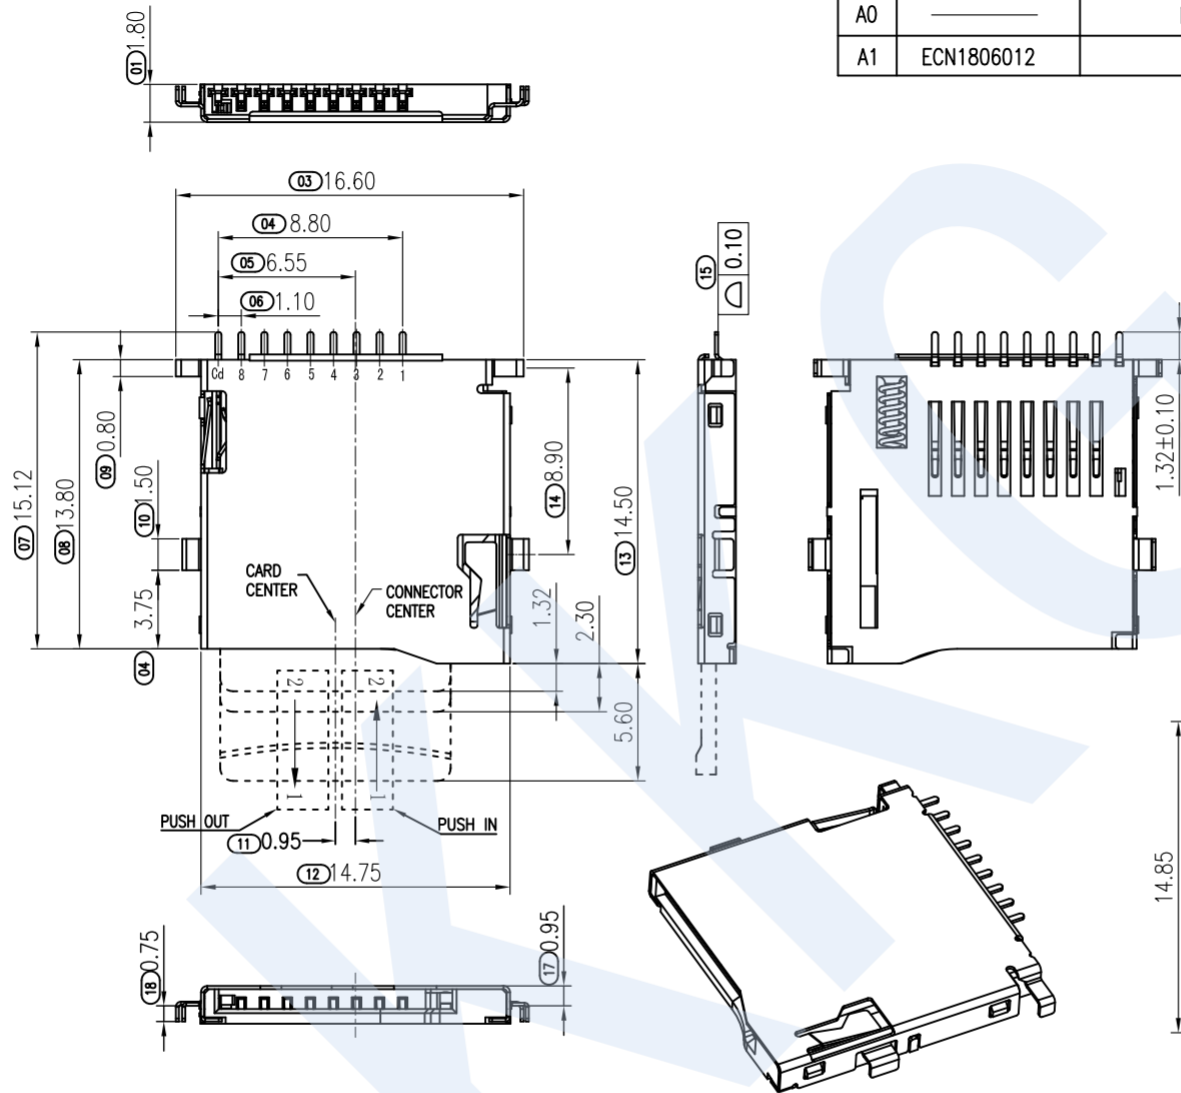


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)


PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MILLIMETERS	INCH	UNITS	MM				
X° ± 2°	X° ± 2°	MAT'L					
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:		TITLE:	
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:			
		QTY		DR:			
		SEE NOTES					
						SCALE	SHEET
						1:1	1/2
							REV.
							A1


RoHS

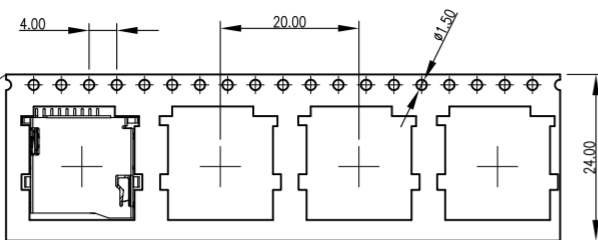



客户拉出方向

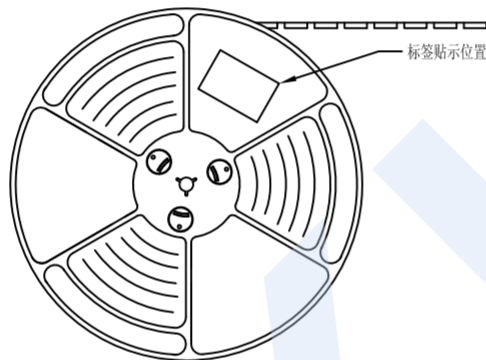

ø330

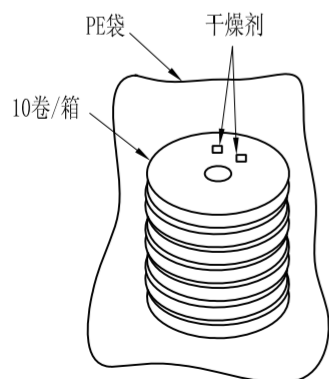


纸箱顶部和底部各垫一块珍珠棉

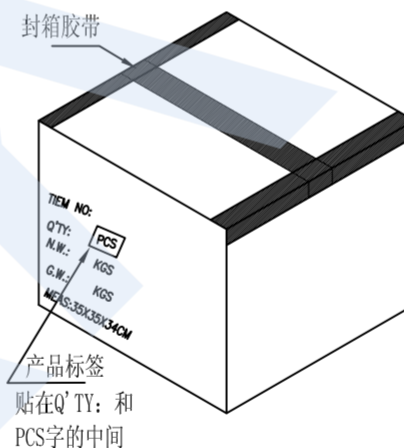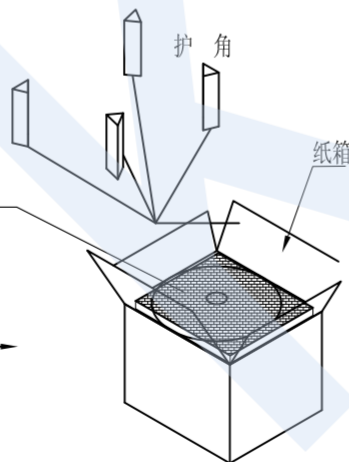



NOTES

1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:

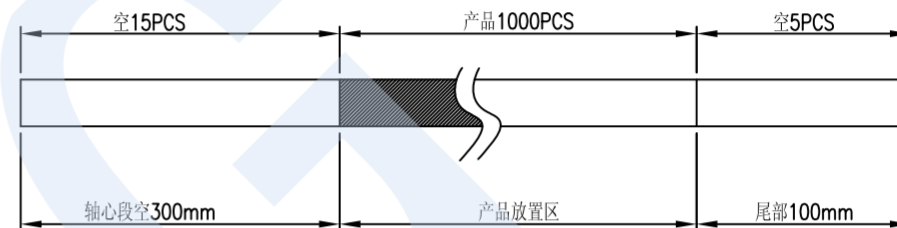

- 3.每箱包装数量:10000PCS/箱

MILLIMETERS	INCH	UNITS	MM		
X° ± 2°	X° ± 2°	MAT'L			
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER.	IIIIC.
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:	TF 正向沉板0.85 (四个脚)DIP型卡座
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:	DWG NO.:
		QTY		DR:	
		SEE NOTES			



SCALE	SHEET	REV.
1:1	2/2	A1